
1000 Series

Heavy Duty SVR Exit Device





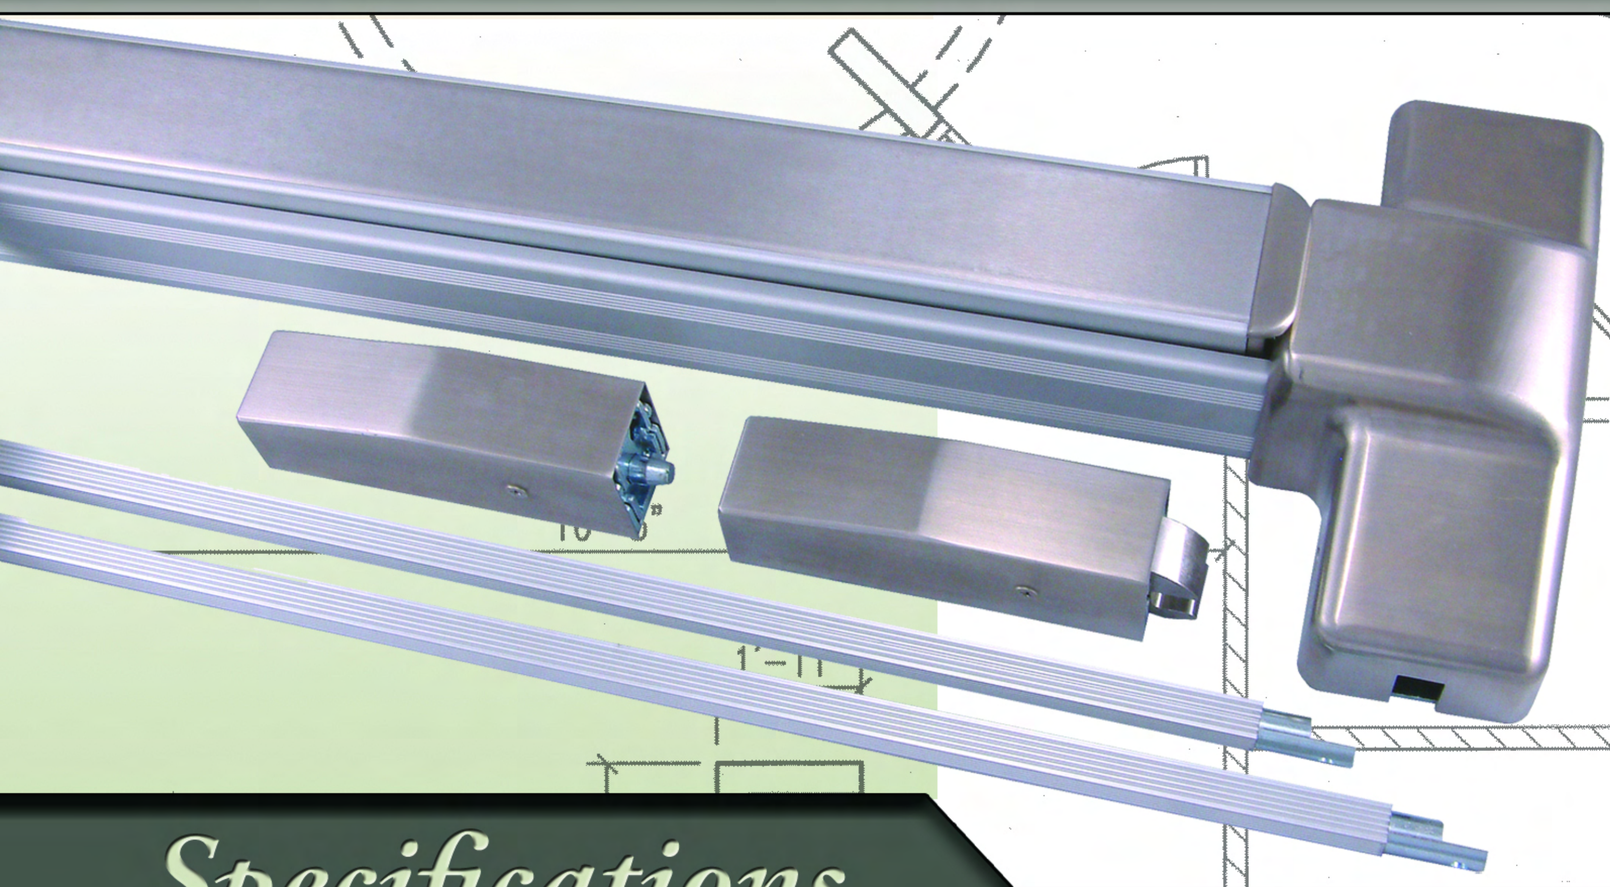

Specifications

ANSI :	Meets & Exceeds ANSI A156.3 - Grade 1 Standards
UL Listings: :	UL Listed for Panic Exit Hardware
	UL Listed for “A” Label 3 Hour Fire Doors to 8’-0“ x 10’-0”
ADA :	Meets ADA requirements ANSI A117.1 with Lever Trim
Handing :	Easily Re-handed in the field - Shipped as RHR
Construction :	Heavy Duty Extruded Anodized Aluminum Channel & Steel Chassis
Finishes :	US3, US4 , US10B, US26, US32D on Headcover, Pushbar & Endcap
Top Latch :	U Shaped Top Latch for Secure Engagement with strike (not electric strike compatible)
Bottom Latch :	Drop Bolt Style Bottom Latch Secures into flat strike & hole in the floor
Dogging :	5/32“ Hex Key Dogging Standard on Panic Exit Hardware
Cylinder Dogging :	Cylinder Dogging Kits available for new or existing exit devices
Device Lengths :	33” for 3’-0” wide doors and 42” for 3-8“ to 4’-0” wide doors
Min. Door Width :	33“ & 42” devices can be cut down to fit on minimum door width of 2’-8“
Door Heights:	7”-0“ Standard - Extended Top Rods available for up to 10’-0” tall doors
Center Case Dim. :	8” Height x 2 7/8” Wide x 2 13/16” Thick - 4 1/2” Minimum stile required
Mechanism Case Dim. :	2 3/16“ Height x 2 3/16” Wide
Projection :	3 3/8” Undogged - Pushbar Neutral & 2 13/16” Dogged - Pushbar Depressed
Fasteners :	Wood, Machine & Self Tapping Machine Screws (F1000V includes thru bolts)
Trim & Accessories :	Latch filler included, Exterior Trims, Shim Kits other accessories available
Electrified Options :	Electric latch retraction, Electric Dogging, Request to exit, Latch bolt monitoring
Under Cut :	1/4” door under cut recommended for 1/4” threshold or no threshold openings
Warranty:	Limited Lifetime Warranty

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net