
2000 Series

Standard Duty Rim Exit Device

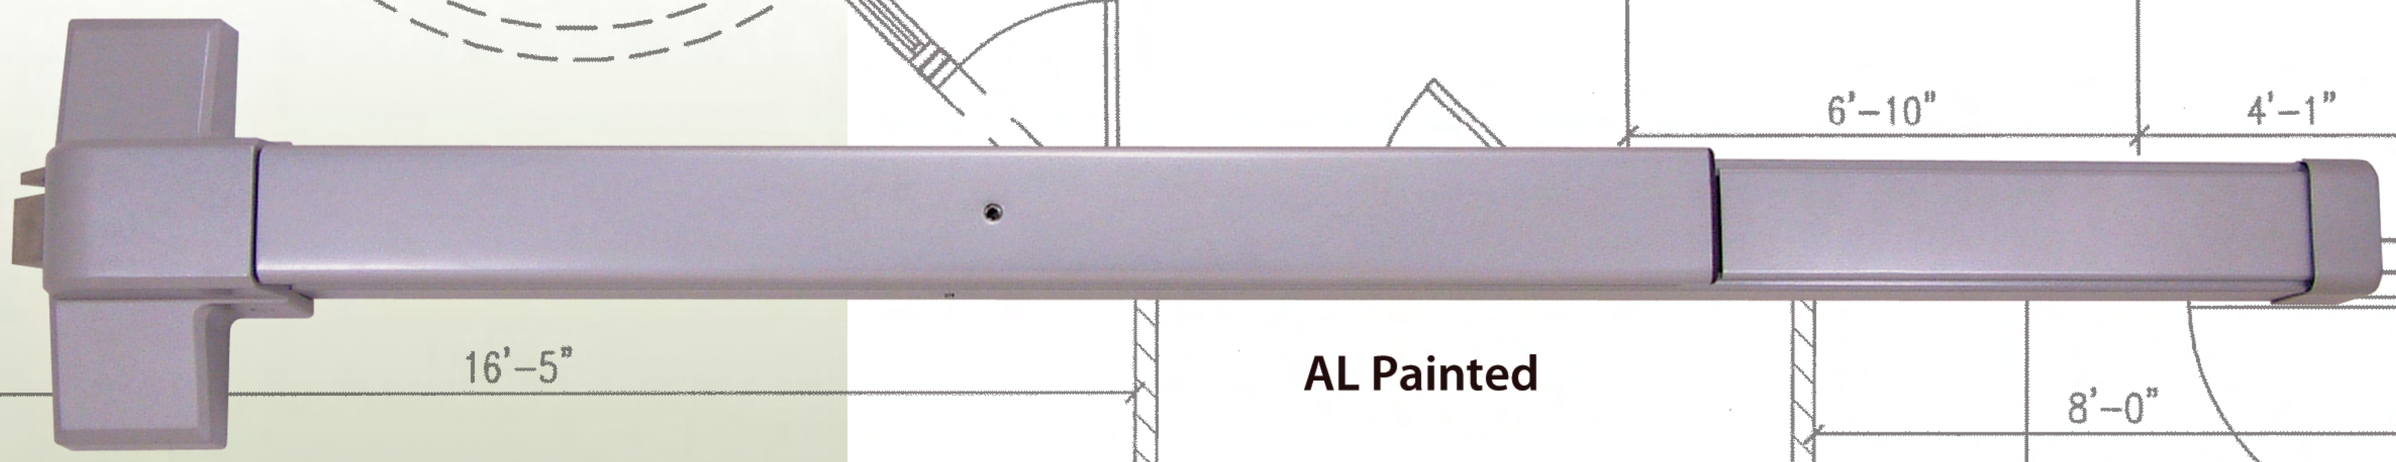


AL Painted

Specifications

ANSI :	Meets ANSI A156.3 - Grade 1 Standards
UL Listings: :	UL Listed for Panic Exit Hardware
	UL Listed for "A" Label 3 Hour Fire Doors
ADA :	Meets ADA requirements ANSI A117.1 with Lever Trim
Handing :	Non Handed - Completely Reversible
Construction :	Roll Formed Steel or Stainless Steel Channel & Steel Chassis
	Steel or Stainless Steel Headcover & End Cap
Finishes :	Aluminum, Dark Bronze, Gold Painted & US32D
Latchbolt :	Deadlocking latchbolt with 5/8" projection
Strike :	Roller Stike with 5/8" projection with 1/8" shim
Dogging :	5/32" Hex Key Dogging Standard on Panic Exit Hardware
Device Lengths :	33" for 3'-0" wide doors and 42" for 3-8" to 4'-0" wide doors
Min. Door Width :	33" & 42" devices can be cut down to fit on 2-4" wide door
Center Case Dim. :	6" Height x 2 5/16" Wide x 2 1/2" Thick - 4" Minimum stile required
Mechanism Case Dim. :	1 5/8" Height x 1 13/16" Wide
Projection :	2 1/2" Undogged - Push bar Neutral & 1 13/16" Dogged - Push bar Depressed
Fasteners :	Wood, Machine & Self Tapping Machine Screws (F2000R includes thru bolts)
Trim & Accessories :	ASA & latch filler included, Exterior Trims, Shim Kits other accessories available
Warranty:	Limited Lifetime Warranty

c UL us LISTED

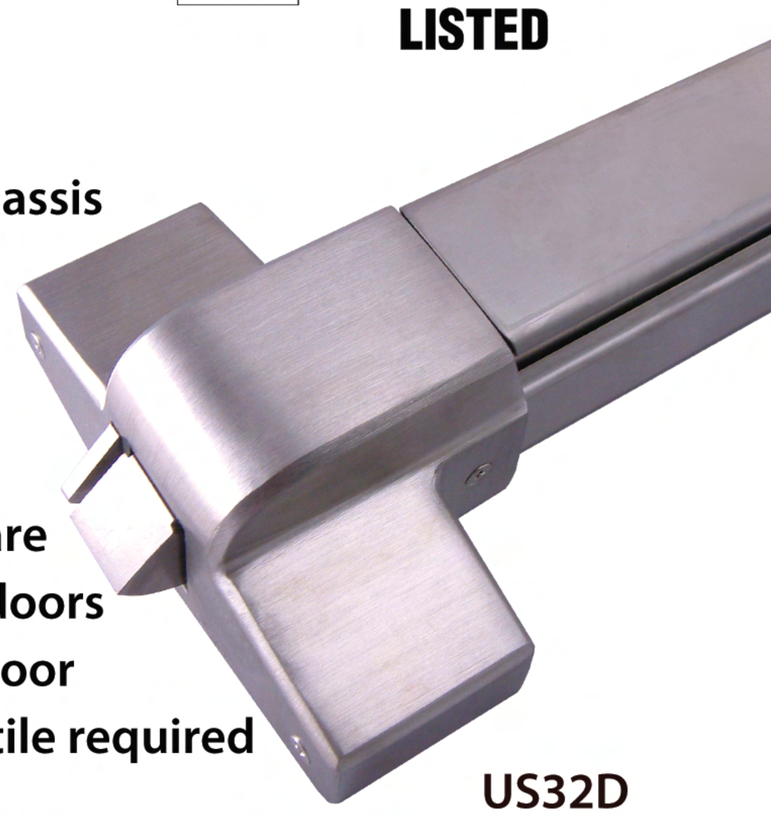

US32D



Gold Painted



BZ Painted

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net