5016N Series Door Closers

Premier Product



The Arrow 5016N Series Surface Applied Door Closers are ideal for use in commercial and institutional facilities where there is a demand for reliability and flexibility. Arrow offers multiple options for compliance with barrier-free codes for interior or exterior doors.

Compliance:

- UL/cUL listed.
- Meets the requirements of UL10C and UBC7.2 (1997) for positive pressure.
- Meets the requirements of ANSI A156.4 and ANSI ICC A117.1. Grade 1
- Meets ADA requirements (Americans with disabilities Act).

BHMA CERTIFIED
Be Safe. Be Secure. Be Certified.

Look for the universal symbol next to Arrow products that comply with ADA accessibility requirements.

Sizes (Adjustable):

- 5016N– Adjustable sizes 1 through 6, Standard Arm or Hold Open Arm.

Interior Door Width	24" (610mm)	30" (762mm)	34" (865mm)	38" (965mm)	48" (1219mm)	54" (1372mm)	60" (1524mm)
Regular Arm & Top Jamb	Size 1	Size 2	Size 3	Size 4	Size 5	Size 6	
Parallel Arm	Size 2	Size 3	Size 4	Size 5	Size 6		

Exterior (& Vestibule) Door Width	24" (610mm)	30" (762mm)	36" (914mm)	42" (1067mm)	48" (1219mm)
Regular Arm & Top Jamb	Size 3	Size 4	Size 5	Size 6	
Parallel Arm	Size 4	Size 5	Size 6		


Features:

- Cast aluminum body.
- Hardened steel rack and pinion.
- High tensile steel springs.
- Staked valves
- Two non-critical adjusting valves (sweep and latch) control closing speed.
- Backcheck intensity valve.
- All temperature fluid.
- Available with a full plastic cover or a slim plastic cover (specify "S" suffix)..
- Non-handed for regular, top jamb and parallel arm mount applications.
- Hold open arm available on adjustable closers.
- Available with optional delayed action adjusted with separate independent valve. Delays door closing to allow unimpeded passage through the opening. Specify "D" suffix
- Supplied with machine screws, fully threaded self-reaming/tapping screws, sleeve nuts and thru-bolts for 1-3/4" thick doors.
- Packaging: one per box and four boxes per carton.
- 10 year limited warranty.


Finishes:

- Aluminum (689), Specify **AL**
- Dark Bronze (690), Specify **DBZ**
- Light Bronze (691), Specify **LBZ**
- Gold (696), Specify **GL**
- Black (693), Specify **BLK**


Regular Arm Installation

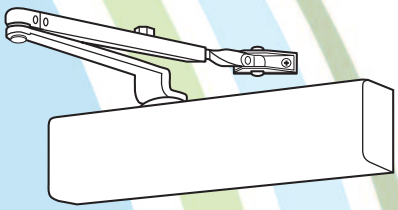

Top Jamb Installation

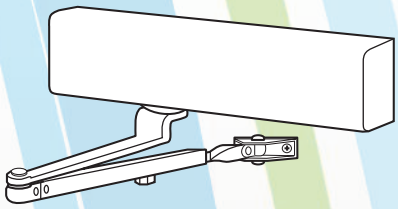

Parallel Arm Installation

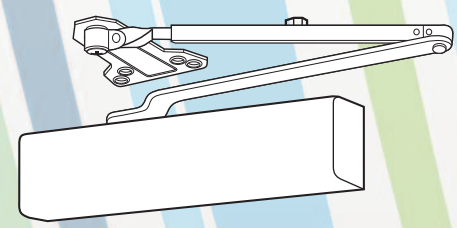


ASSA ABLOY, the global leader in door opening solutions

ARROW LOCK & DOOR HARDWARE
ASSA ABLOY

5016N Series Door Closers

Premier Product

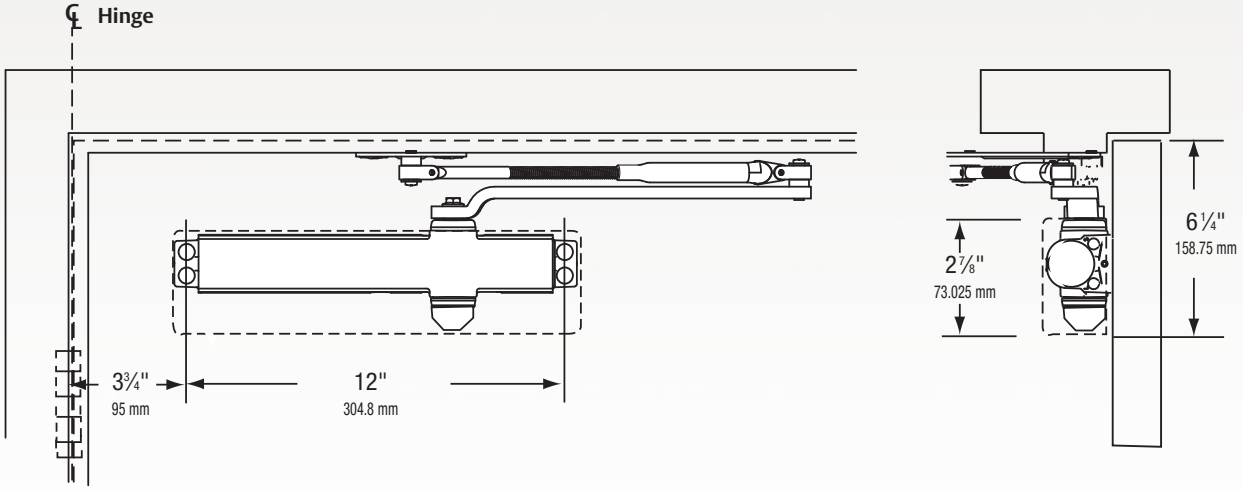

How to order the 5016N Series

Ordering Example:

Quantity	Part Number		Finish
20	5016N	•	AL

Complete Units:

	Part No.
Tri-Pack, Slim Plastic Cover, Standard Arm, Sizes 1-6	5016NS
Tri-Pack, Full Plastic Cover, Standard Arm, Sizes 1-6	5016N
Tri-Pack, Slim Cover, Standard Arm, Sizes 1-6, Delayed Action	5016NSD
Tri-Pack, Full Cover, Standard Arm, Sizes 1-6, Delayed Action	5016ND
Tri-Pack, Slim Plastic Cover, Hold Open Arm, Sizes 1-6	5016NSH
Tri-Pack, Full Plastic Cover, Hold Open Arm, Sizes 1-6	5016NH
Tri-Pack, Slim Plastic Cover, Hold Open Arm, Sizes 1-6, Delayed Action	5016NSHD
Tri-Pack, Full Plastic Cover, Hold Open Arm, Sizes 1-6, Delayed Action	5016NHD

Parts & Accessories:

	Part No.
Drop Plate	5016DP
Full Plastic Cover	5016FC
Slim Plastic Cover	5016SC
5016N Closer Body Only	5016BO
5016N Closer Body Only with Delayed Action	5016BOD
Through-Bolts for 1-3/8" Thick Door	5016TB38
Through-Bolts for 1-3/4" Thick Door	5016TB34
Complete Non-Hold Open Arm Assembly (tri-pack)	5016CNA
Complete Hold Open Arm Assembly (tri-pack)	5016CHA

Specify Finish: AL, DBZ, LBZ, GL, or BLK