
1000 Series Heavy Duty Rim Exit Device

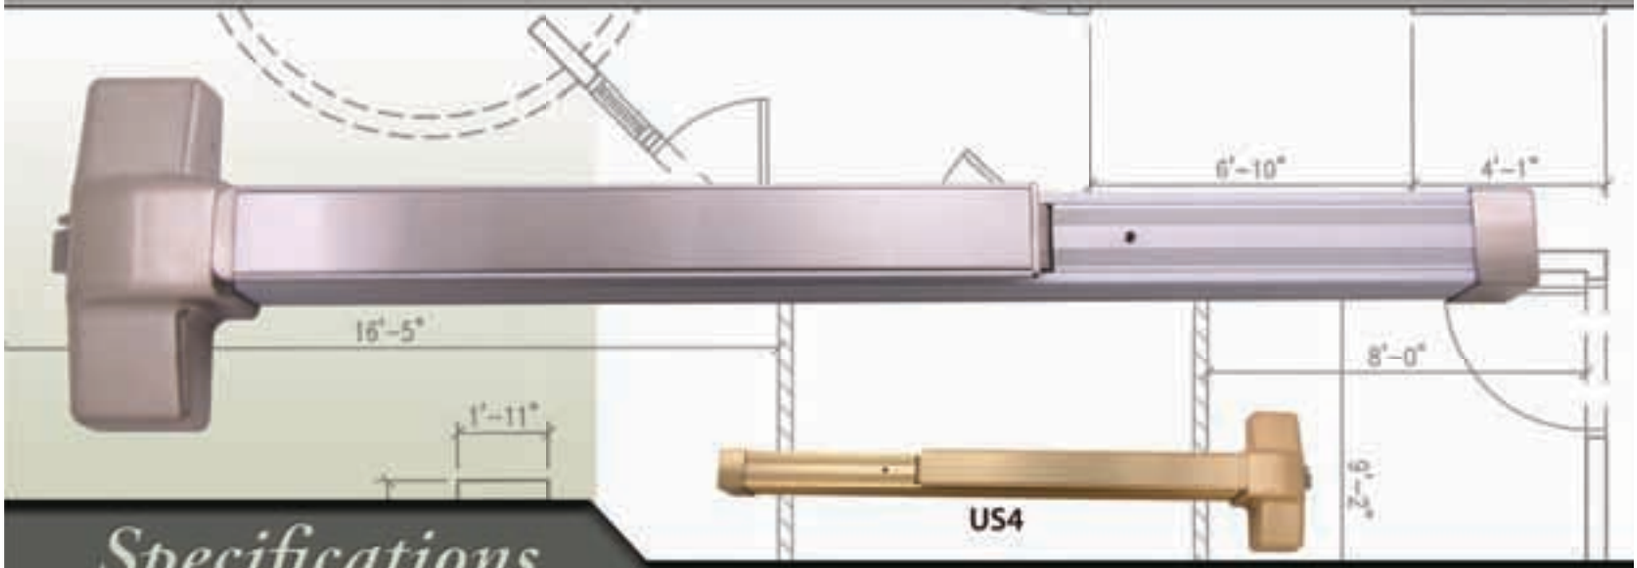

US4

Specifications

ANSI :	Meets & Exceeds ANSI A156.3 - Grade 1 Standards
UL Listing :	UL Listed for Panic Exit Hardware
Fire Rating :	UL Listed for "A" Label 3 Hour Fire Doors
ADA :	Meets ADA requirements ANSI A117.1 with Lever Trim
Handing :	Non Handed - Completely Reversible
Construction :	Heavy Duty Extruded Anodized Aluminum Channel & Steel Chassis
Finishes :	US3, US4 , US10B, US26 & US32D on Headcover, Pushbar & End Cap
Latchbolt :	Deadlocking latchbolt with 5/8" projection
Strike :	Roller Stike with 5/8" projection & 1/8" shim
Dogging :	5/32" Hex Key Dogging Standard on Panic Exit Hardware
Cylinder Dogging :	Cylinder Dogging Kits available for new or existing exit devices
Device Lengths :	33" for 3'-0" wide doors and 42" for 3-8" to 4'-0" wide doors
Min. Door Width :	33" & 42" devices can be cut down to fit on 2-8" wide door
Center Case Dim. :	8" Height x 2 7/8" Wide x 2 13/16" Thick - 4 1/2" Minimum stile required
Mechanism Case Dim. :	2 3/16" Height x 2 3/16" Wide
Projection :	3 3/8" Undogged - Pushbar Neutral & 2 13/16" Dogged - Pushbar Depressed
Fasteners :	Wood, Machine & Self Tapping Machine Screws (F1000R includes thru bolts)
Trim & Accessories :	ASA & latch fillers included, Exterior Trims, Shim Kits & other accessories available
Alarmed Exits :	Exit Alarm Kit ALK-1000 available for new or existing devices
Electrification :	ELR - Electric latch retraction, ED - Electric dogging, REX - Request to exit, LBM - Latch bolt monitoring available, See electrified section
Warranty:	Limited Lifetime Warranty

c UL us LISTED



US32D



US10B

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

1000R/F1000R Trim & Accessories

Exit Device Trims

Lever Escutcheon Trims




LE-08 Entry

LE-08A Passage

LE-02DT Dummy

LE Trim Finishes: US3, US4, US10B, US26, US32D
Curved Lever available in US32D & US10B

Key In Lever Trims

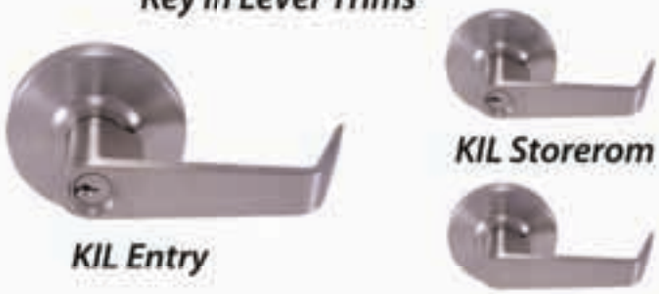

KIL Entry

KIL Storerom

KIL Passage

KIL Trim Finishes: US3, US4, US10B, US26, US26D
Curved, Half Curved, S-A & S-B Lever styles available with lever kits

Pull Trims



2P-03NL Night Latch

2P-02DT Dummy

Thumbpiece Trims



TP-08 Entry

TP-08A Passage

TP-02DT Dummy

Finger Pull Trims



DFP-03NL Night Latch

DFP-02DT Dummy

FP-03NL Night Latch
US32D only



KIK Passage

KIK Storeroom

KIK Entry

Key In Knob
US26D only

2P, TP & DFP Trim Finishes: US3, US4, US10B, US26, US32D

Strikes, Parts & Accessories



Roller Strike & Shim



Double Door Strike



Thru Bolts - 6 pk.



1/8" Shim Kit



ASA Filler Plate



Latchbolt Filler Plate

Exit Alarm Kit ALK-1000



Cylinder Dogging Kit




211 Endeavor Drive - PO Box 680
Rogersville, MO 65742


www.designhardware.net

PH 877-258-1262
FX 877-888-0150

1000 Series *Heavy Duty SVR Exit Device*

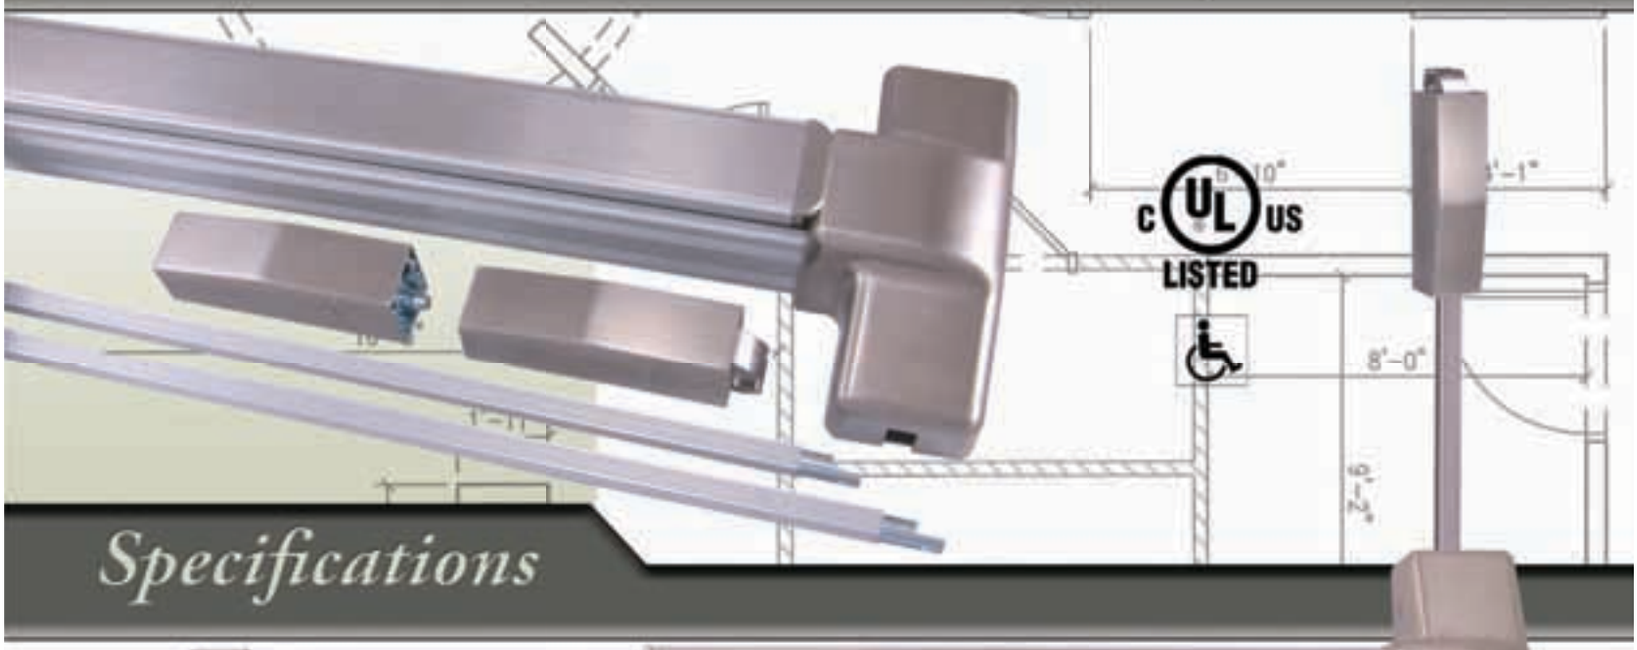

Specifications

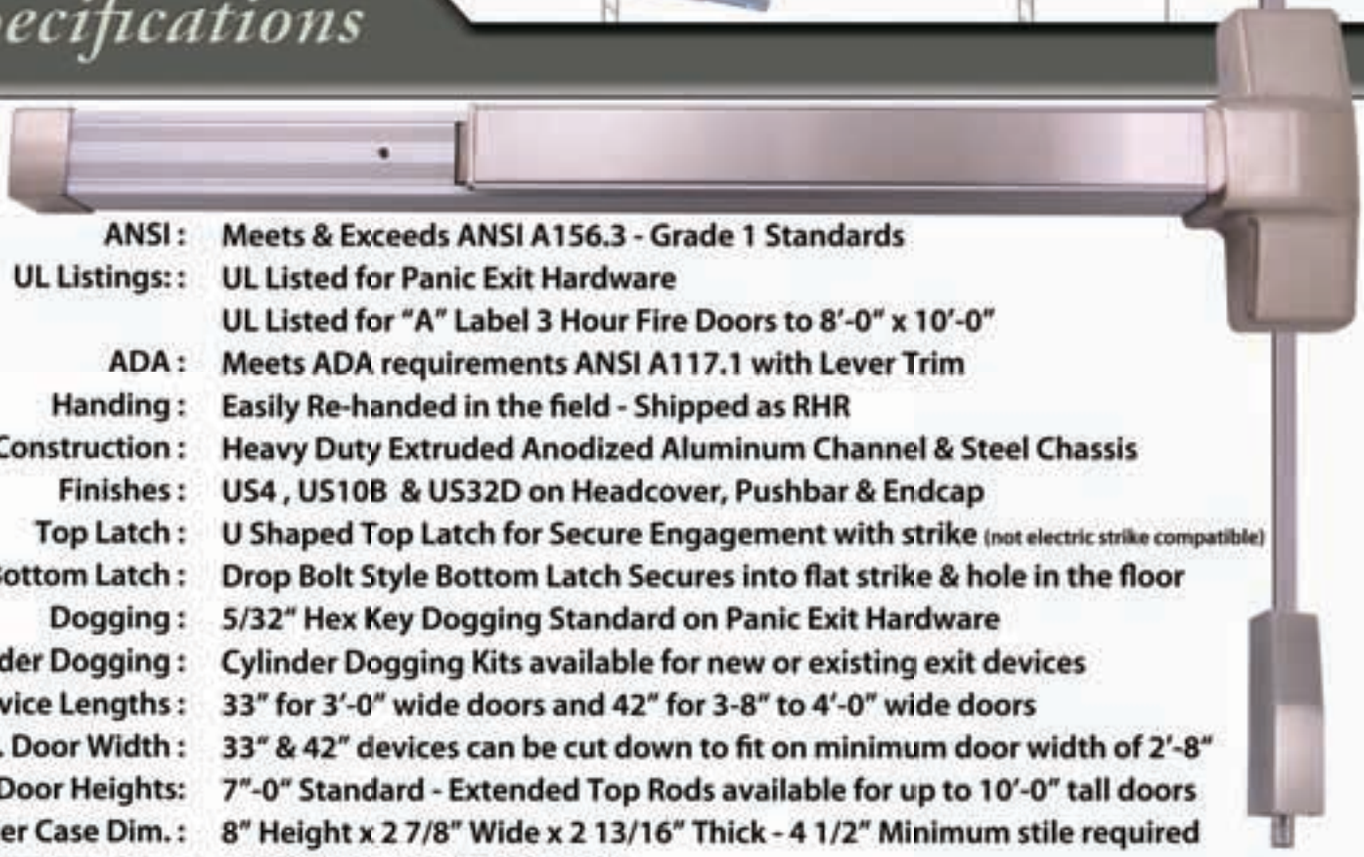

ANSI :	Meets & Exceeds ANSI A156.3 - Grade 1 Standards
UL Listings: :	UL Listed for Panic Exit Hardware
	UL Listed for "A" Label 3 Hour Fire Doors to 8'-0" x 10'-0"
ADA :	Meets ADA requirements ANSI A117.1 with Lever Trim
Handing :	Easily Re-handed in the field - Shipped as RHR
Construction :	Heavy Duty Extruded Anodized Aluminum Channel & Steel Chassis
Finishes :	US4 , US10B & US32D on Headcover, Pushbar & Endcap
Top Latch :	U Shaped Top Latch for Secure Engagement with strike (not electric strike compatible)
Bottom Latch :	Drop Bolt Style Bottom Latch Secures into flat strike & hole in the floor
Dogging :	5/32" Hex Key Dogging Standard on Panic Exit Hardware
Cylinder Dogging :	Cylinder Dogging Kits available for new or existing exit devices
Device Lengths :	33" for 3'-0" wide doors and 42" for 3-8" to 4'-0" wide doors
Min. Door Width :	33" & 42" devices can be cut down to fit on minimum door width of 2'-8"
Door Heights:	7"-0" Standard - Extended Top Rods available for up to 10'-0" tall doors
Center Case Dim. :	8" Height x 2 7/8" Wide x 2 13/16" Thick - 4 1/2" Minimum stile required
Mechanism Case Dim. :	2 3/16" Height x 2 3/16" Wide
Projection :	3 3/8" Undogged - Pushbar Neutral & 2 13/16" Dogged - Pushbar Depressed
Fasteners :	Wood, Machine & Self Tapping Machine Screws (F1000V includes thru bolts)
Trim & Accessories :	Latch filler included, Exterior Trims, Shim Kits other accessories available
Electrified Options :	Electric latch retraction, Electric Dogging, Request to exit, Latch bolt monitoring
Under Cut :	1/4" door under cut recommended for 1/4" threshold or no threshold openings
Warranty:	Limited Lifetime Warranty

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

1000V/F1000V Trim & Accessories

Exit Device Trims

Lever Escutcheon Trims




LE-08 Entry

LE-08A Passage

LE-02DT Dummy

LE Trim Finishes: US3, US4, US10B, US26, US32D
Curved Lever available in US32D & US10B

Key In Lever Trims

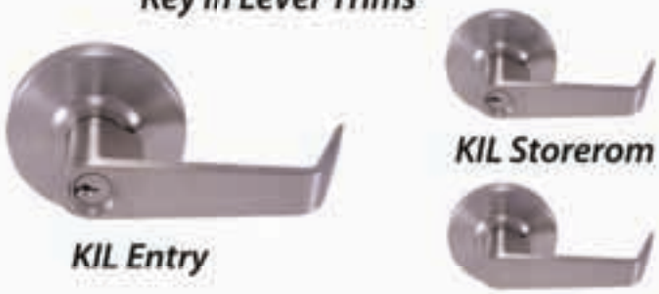

KIL Entry

KIL Storerom

KIL Passage

KIL Trim Finishes: US3, US4, US10B, US26, US26D
Curved, Half Curved, S-A & S-B Lever styles available with lever kits

Pull Trims



2P-03NL Night Latch



2P-02DT Dummy

Thumbpiece Trims



TP-08 Entry



TP-08A Passage



TP-02DT Dummy

Finger Pull Trims



DFP-03NL Night Latch



DFP-02DT Dummy



FP-03NL Night Latch
US32D only



KIK Passage



KIK Storeroom



KIK Entry

Key In Knob
US26D only

2P, TP & DFP Trim Finishes: US3, US4, US10B, US26, US32D

Strikes, Parts & Accessories



Top Strike



Flat Bottom Strike



Thru Bolts - 12 pk.



1/8" Shim Kit



Top Rods for 8'-0" or 10'-0" Tall Doors

Exit Alarm Kit ALK-1000



Cylinder Dogging Kit




211 Endeavor Drive - PO Box 680
Rogersville, MO 65742

www.designhardware.net

PH 877-258-1262
FX 877-888-0150

2000 Series Standard Duty Rim Exit Device

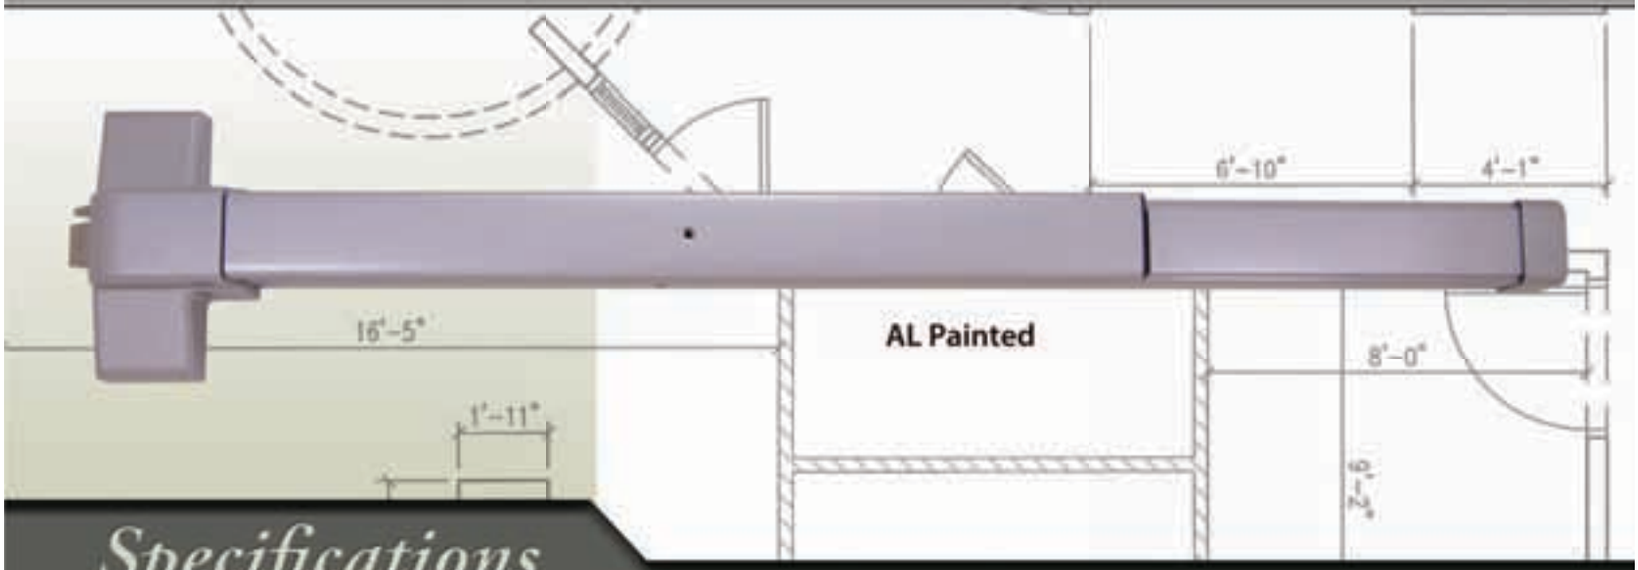

AL Painted

Specifications

ANSI :	Meets ANSI A156.3 - Grade 1 Standards
UL Listings: :	UL Listed for Panic Exit Hardware
	UL Listed for "A" Label 3 Hour Fire Doors
ADA :	Meets ADA requirements ANSI A117.1 with Lever Trim
Handing :	Non Handed - Completely Reversible
Construction :	Roll Formed Steel or Stainless Steel Channel & Steel Chassis
	Steel or Stainless Steel Headcover & End Cap
Finishes :	Aluminum, Dark Bronze, Gold Painted & US32D
Latchbolt :	Deadlocking latchbolt with 5/8" projection
Strike :	Roller Stike with 5/8" projection with 1/8" shim
Dogging :	5/32" Hex Key Dogging Standard on Panic Exit Hardware
Device Lengths :	33" for 3'-0" wide doors and 42" for 3-8" to 4'-0" wide doors
Min. Door Width :	33" & 42" devices can be cut down to fit on 2-4" wide door
Center Case Dim. :	6" Height x 2 5/16" Wide x 2 1/2" Thick - 4" Minimum stile required
Mechanism Case Dim. :	1 5/8" Height x 1 13/16" Wide
Projection :	2 1/2" Undogged - Push bar Neutral & 1 13/16" Dogged - Push bar Depressed
Fasteners :	Wood, Machine & Self Tapping Machine Screws (F2000R includes thru bolts)
Trim & Accessories :	ASA & latch filler included, Exterior Trims, Shim Kits other accessories available
Warranty:	Limited Lifetime Warranty

c UL us LISTED



US32D



Gold Painted



BZ Painted

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

2000R/F2000R Trim & Accessories

Exit Device Trims

Lever Escutcheon Trims



LE-08 Entry

LE-08A Passage

LE-02DT Dummy

Key In Lever Trims



KIL Entry



KIL Storerom



KIL Passage

Curved, Half Curved, S-A & S-B Lever styles available with lever kits

Pull Trims



2P-03NL Night Latch



2P-02DT Dummy

Thumbpiece Trims



TP-08 Entry



TP-08A Passage



TP-02DT Dummy

Finger Pull Trims



DFP-03NL Night Latch



DFP-02DT Dummy



FP-03NL Night Latch
US32D only



KIK Passage



KIK Storeroom



KIK Entry

Key In Knob
US26D only

Strikes, Parts & Accessories



Roller Strike & Shim



Double Door Strike



Thru Bolts - 6 pk.



Screw Pack



1/8" Shim Kit



End Cap



ASA Filler Plate



Latchbolt Filler Plate




5/32" Hex Dogging Key

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742

www.designhardware.net

PH 877-258-1262
FX 877-888-0150

2000 Series Standard Duty SVR Exit Device

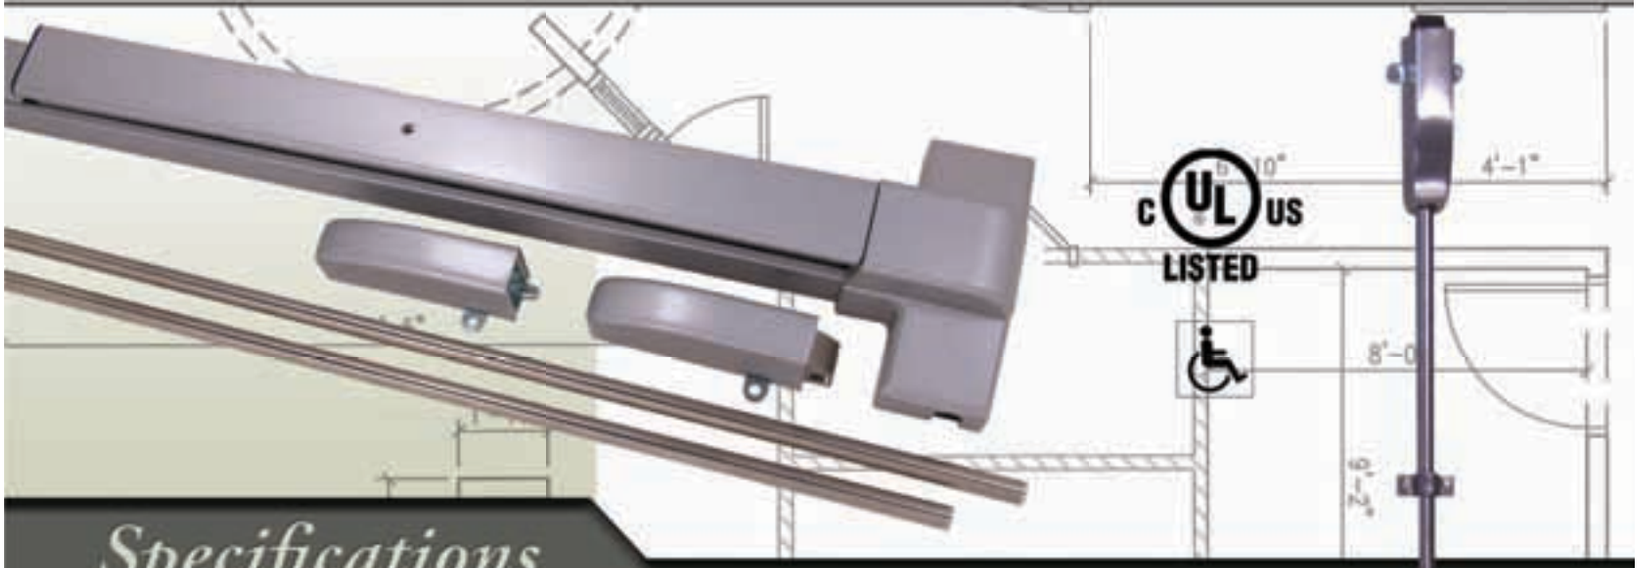

Specifications



ANSI :	Meets & Exceeds ANSI A156.3 - Grade 1 Standards
UL Listings: :	UL Listed for Panic Exit Hardware
	UL Listed for "A" Label 3 Hour Fire Doors to 8'-0" x 10'-0"
ADA :	Meets ADA requirements ANSI A117.1 with Lever Trim
Handing :	Easily Re-handed in the field - Shipped as RHR
Construction :	Roll Formed Steel or Stainless Steel Channel & Steel Chassis
	Steel or Stainless Steel Head Cover & End Cap
Finishes :	Aluminum, Dark Bronze, Gold Painted & US32D
Top Latch :	U Shaped Top Latch for Secure Engagement with strike
Bottom Latch :	Drop Bolt Style Bottom Latch Secures into flat strike & hole in the floor
Dogging :	5/32" Hex Key Dogging Standard on Panic Exit Hardware
Cylinder Dogging :	Cylinder Dogging Kits available for new or existing exit devices
Device Lengths :	33" for 3'-0" wide doors and 42" for 3-8" to 4'-0" wide doors
Min. Door Width :	33" & 42" devices can be cut down to fit on minimum door width of 2'-4"
Door Heights:	7"-0" Standard - Extended Top Rods available for up to 10'-0" tall doors
Center Case Dim. :	6" Height x 2 5/16" Wide x 2 1/2" Thick - 4" Minimum stile required
Mechanism Case Dim. :	1 5/8" Height x 1 13/16" Wide
Projection :	2 1/2" Undogged - Pushbar Neutral & 1 13/16" Dogged - Pushbar Depressed
Fasteners :	Wood, Machine & Self Tapping Machine Screws (F2000V includes thru bolts)
Trim & Accessories :	Latch filler included, Exterior Trims, Shim Kits other accessories available
Warranty:	Limited Lifetime Warranty

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

2000V/F2000V Trim & Accessories

Exit Device Trims

Lever Escutcheon Trims



LE-08
Entry



LE-08A
Passage



LE-02DT
Dummy

Key In Lever Trims



KIL Entry



KIL Storerom



KIL Passage

Curved, Half Curved, S-A & S-B Lever styles available with lever kits

Pull Trims



2P-03NL
Night Latch



2P-02DT
Dummy

Thumbpiece Trims



TP-08
Entry



TP-08A
Passage



TP-02DT
Dummy

Finger Pull Trims



DFP-03NL
Night Latch



DFP-02DT
Dummy



FP-03NL
Night Latch
US32D only



KIK Passage



KIK Storeroom



KIK Entry

Key In Knob
US26D only

Strikes, Parts & Accessories



Top Strike



Flat Bottom Strike



Thru Bolts - 12 pk.



Latchbolt Filler Plate



1/8" Shim Kit



End Cap



Screw Pack



5/32" Hex Dogging Key



Top Rods for 8'-0" or 10'-0" Tall Doors

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742

www.designhardware.net

PH 877-258-1262
FX 877-888-0150

LE Trim

Heavy Duty Lever Escutcheon Trim




Specifications

ANSI :	**ANSI A156.3, Grade 1**
ADA :	**Meets ADA requirements ANSI A117.1**
Construction :	**Steel, Zinc Dichromated Chassis - Stainless Steel Exterior Housing**
Application :	**Heavy Duty trim option for use with all 1000 & 2000 series exit devices**
Mounting :	**Thru bolted design thru bolts to head of exit device**
Spindle :	**5/16" Square, Steel - Machined & Heat Treated**
Lever :	**5" Solid Stainless Steel lever - 2 7/8" total projection**
Lever Designs :	**Flat (standard, shown above) Curved lever available in US32D only**
Escutcheon :	**3" Wide x 9" Height x 3/4" Projection - Will cover 161 door prep**
Handing :	**Non-Handed, Field selected at the time of installation**
Door Thickness :	**1 3/4" standard- Thick door kits available for 2" thick doors**
Functions :	**02DT Dummy, 08 Entry (convertible to 03NL - Night latch), 08A Passage**
Fasteners :	**Includes thru bolt posts and 1/4"-20 machine screws for installation**
Standard Cylinder :	**1 1/8" Mortise Cylinder with std. cam (included) - 6 Pin Brass, C Kwy, with 2 Keys**
Optional Cylinders :	**1 3/8" Mortise cylinder *housing for 6 or 7 pin* Small format IC core (less core)**
Optional Keyways :	**11 Popular competitor keyways available with replacement cylinders**
Finishes :	**US3, US4 , US10B, US26, US32D**
Accessories :	**1/8" Cylinder collar spacer rings - (2 are supplied with IC housings)**
Electrified Options :	**12 or 24 Volt (AC/DC) Fail Safe (Electrically Locked), Fail Safe (Electrically Unlocked)**
Warranty :	**Limited Lifetime Warranty**

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

KIL Trim Key in Lever Trim

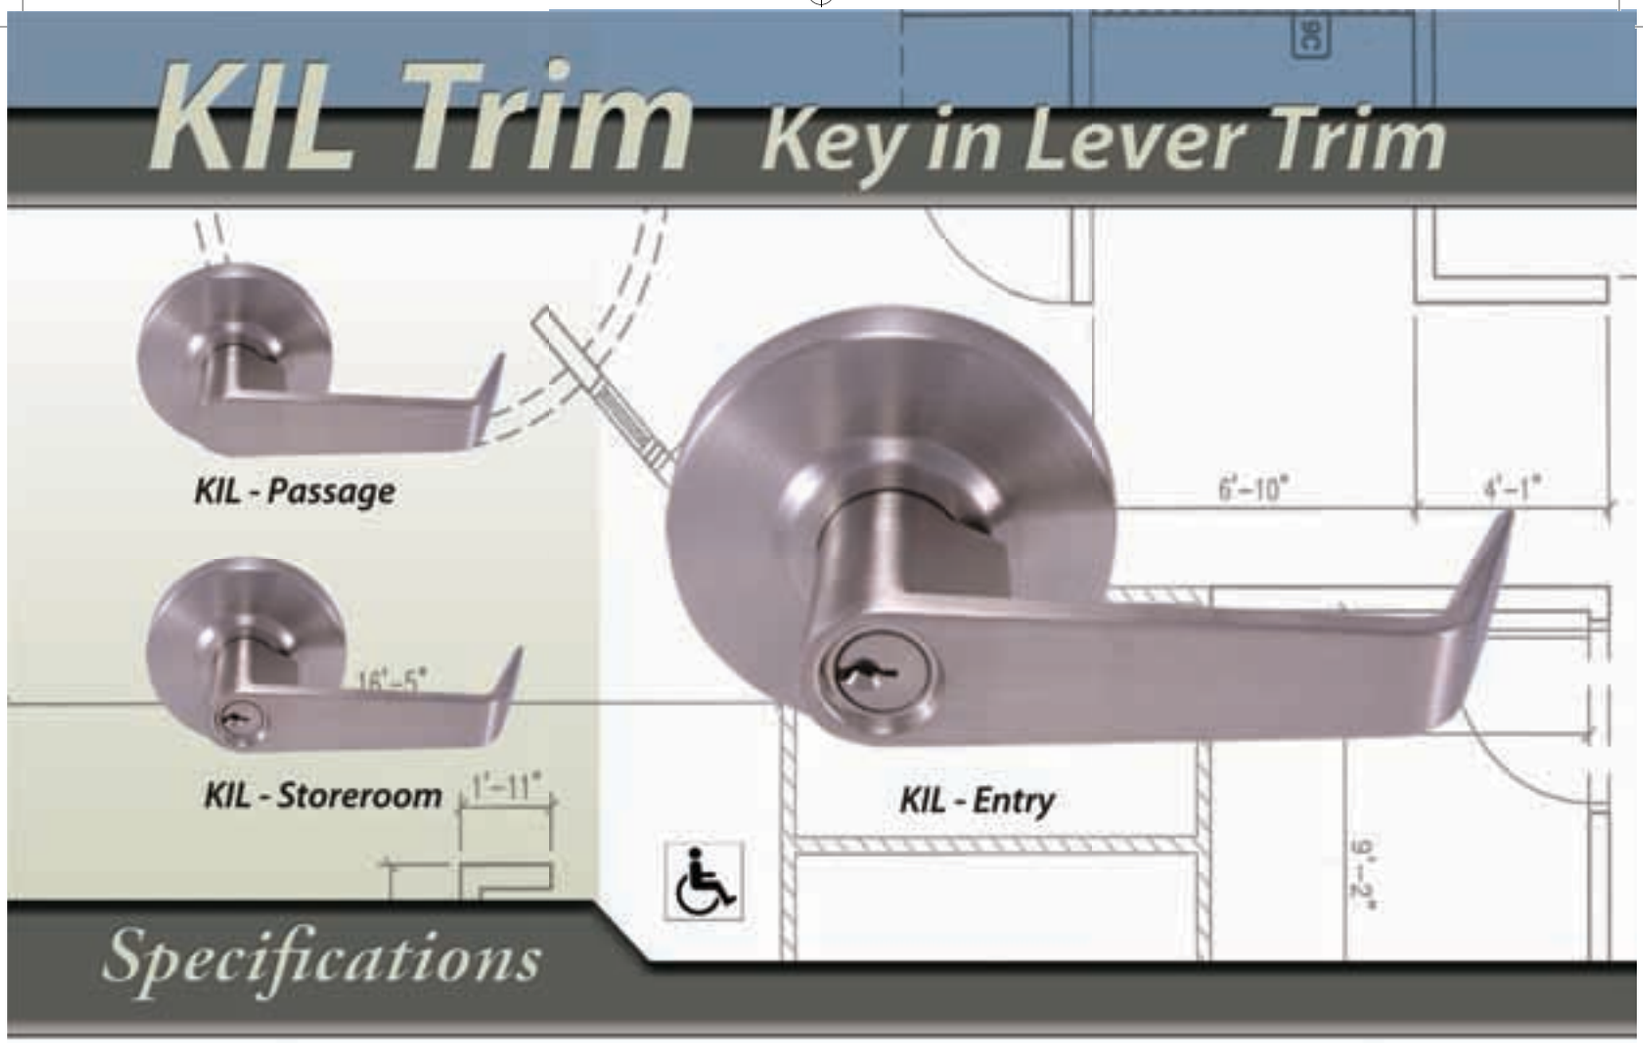

Specifications

ANSI :	ANSI A156.3, Grade 1
ADA :	Meets ADA requirements ANSI A117.1
Construction :	Steel, Zinc Dichromated Chassis with Secure Thru Bolted design
Application :	Standard Duty lever trim option for 1000R & 2000R (Not recommended for SVR devices, Heavy Duty LE trim recommended)
Door Prep :	Installs in 2 1/8" 161 door prep
Actuator :	Cross shaped stainless steel
Lever :	5" Solid Zinc Diecast lever - 2 7/8" total projection
Lever Designs :	Flat (standard, shown above) Curved, Half Curved, S-A & S-B (available with lever kits)
Rose :	3 3/8" Wrought Brass Roses
Handing :	Non-Handed Completely Reversible
Door Thickness :	1 3/4" standard - available for 2" thick doors, specify when ordering
Functions :	Passage, Storeroom & Entry
Cylinder Options :	6 Pin Brass, C Kwy, with 2 Keys std., Prepared for Small format IC core (less core)
Optional Keyway :	11 Popular competitor keyways available with replacement cylinders
Finishes :	US3, US4 , US10B, US26, US26D
Warranty :	Limited Lifetime Warranty



KIL - Storeroom IC



KIL - Entry IC

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

2P Trim Pull Trim




Specifications

Construction :	**Stainless Steel Construction**
Pull Plate :	**3" Wide x 13 7/8" Height x 1/16" thick**
Pull :	**3/4" diameter hollow x 6 1/4" ctc x 2 7/16" projection**
Application :	**Pull trim option for 1000R & 2000R. Will cover 161 door prep**
	(Not recommended for SVR devices as rods can be hard to lift with rim cylinder tailpiece)
Mounting :	**Thru bolted design thru bolts to head of exit device and to door with finish washer. Will cover 161 door prep**
Handing :	**Non-Handed**
Door Thickness :	**1 3/4"**
Functions :	**02DT Dummy, 03-NL Night latch (key retracts latch)**
Accessories :	**03-NL includes cylinder sleeve for installation into 161 door prep**
Fasteners :	**Includes thru bolt posts, 1/4"-20 machine screws & finish washer for installation**
Cylinders :	**Rim Cylinder required for 03NL (not included)**
	Rim cylinder housing for 6 or 7 pin Small format IC core (less core) also available
Optional Keyways :	**11 Popular competitor keyways available with replacement cylinders**
Finishes :	**US3, US4 , US10B, US26, US32D**
Warranty :	**Limited Lifetime Warranty**

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

TP Trim Thumbpiece Pull Trim

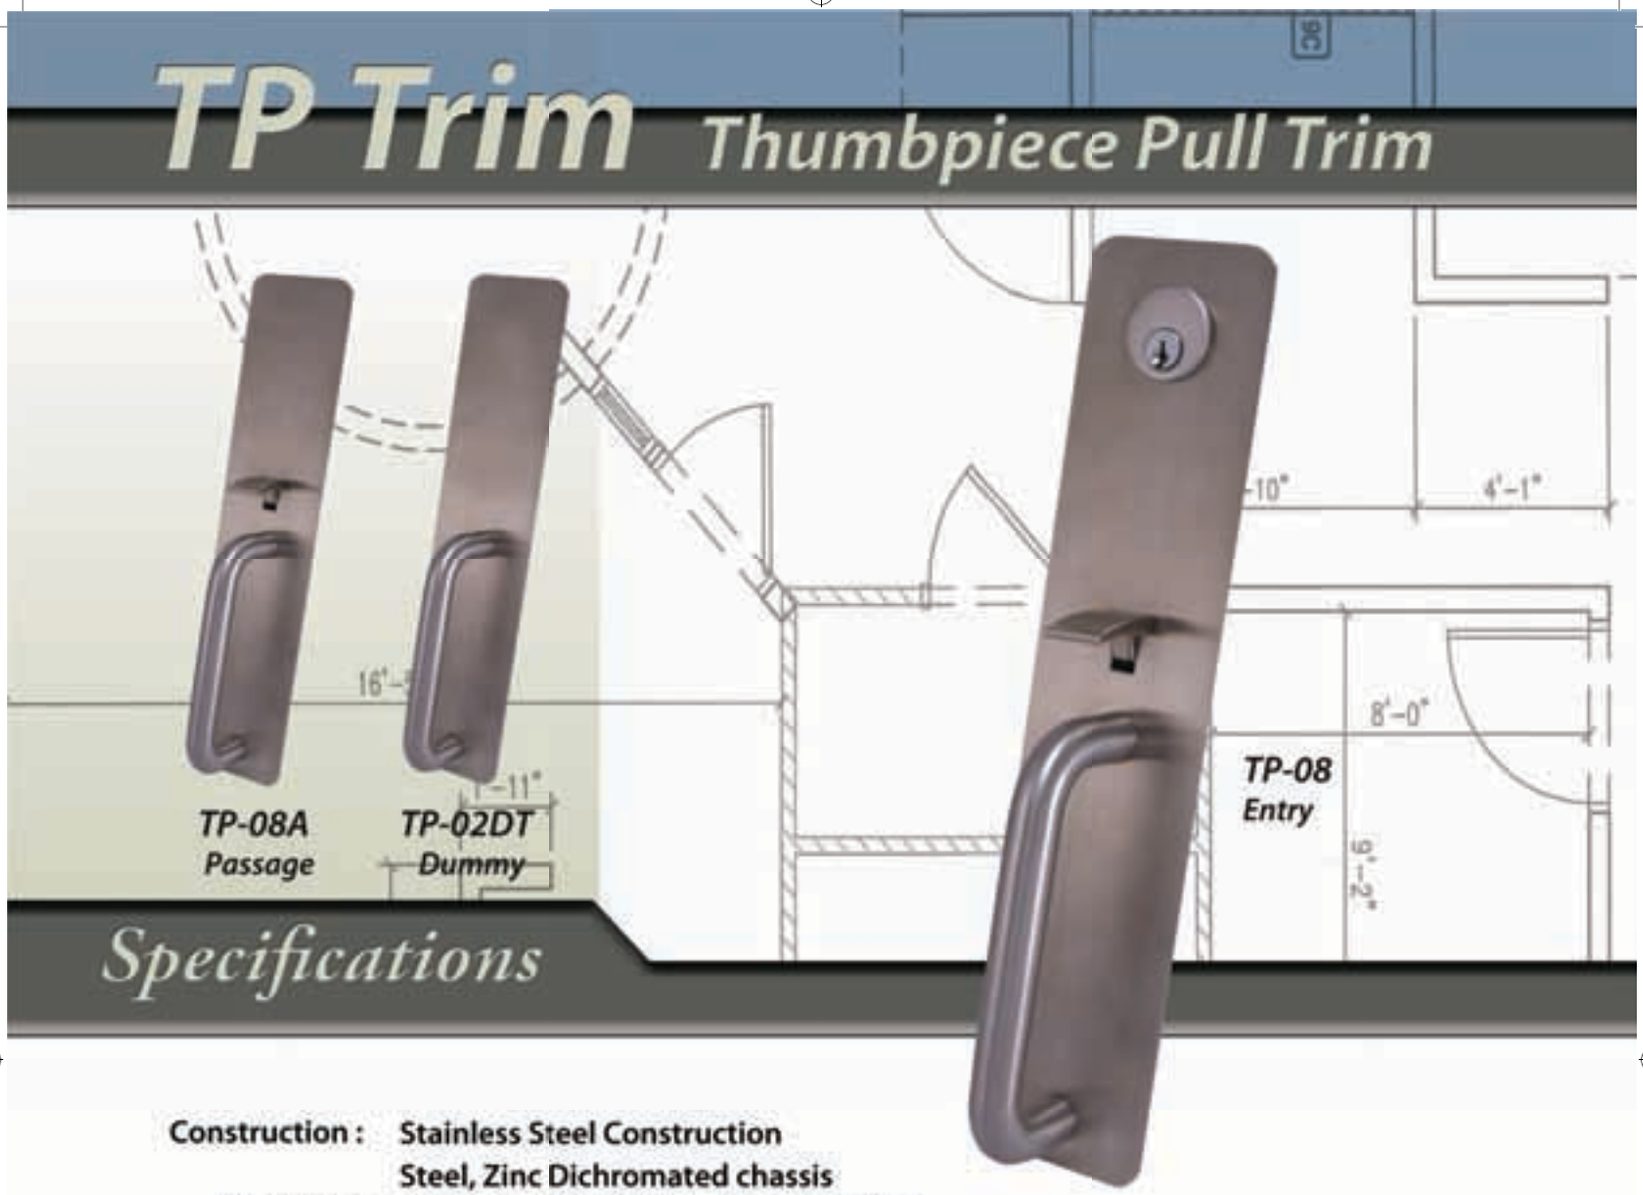

Specifications

Construction :	**Stainless Steel Construction Steel, Zinc Dichromated chassis**
Pull Plate :	**3" Wide x 13 3/4" Height x 1/16" thick**
Pull :	**3/4" diameter hollow x 6" ctc x 2 7/16" projection**
Application :	**Pull trim with thumbpiece control option for 1000R & 2000R *(Not recommended for SVR devices as rods can be hard to lift with thumbpiece)***
Mounting :	**Thru bolted design thru bolts to head of exit device and to door with finish washer. Will cover 161 door prep**
Handing :	**Non-Handed**
Door Thickness :	**1 3/4" standard - Add the suffix -TD for 2" thick door**
Functions :	**02DT Dummy, 08 Entry, 08A Passage**
Standard Cylinder :	**1 1/4" Mortise Cylinder with std. cam (included) - 6 Pin Brass, C Kwy, with 2 Keys**
Optional Cylinders :	**1 3/8" Mortise cylinder housing for 6 or 7 pin Small format IC core (less core)**
Optional Keyways :	**11 Popular competitor keyways available with replacement cylinders**
Finishes :	**US3, US4 , US10B, US26, US32D**
Warranty :	**Limited Lifetime Warranty**

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

DFP Trim Pull Trim



Specifications

Construction :	**Stainless Steel Construction**
Pull Plate :	**3" Wide x 8" Height x 1/16" thick x 1 11/16" projection**
Application :	**Economical pull trim option for 1000R & 2000R. Will cover 161 door prep**
	(Not recommended for SVR devices as rods can be hard to lift with rim cylinder tailpiece)
Mounting :	**Thru bolted design thru bolts to head of exit device.**
Handing :	**Non-Handed**
Door Thickness :	**1 3/4"**
Functions :	**02DT Dummy, 03-NL Night latch (key retracts latch)**
Accessories :	**03-NL includes cylinder sleeve for installation into 161 door prep**
Fasteners :	**Includes (4) thru bolts and 1/4"-20 machine screws for installation**
Cylinders :	**Rim Cylinder required for 03NL (not included)**
	Rim cylinder housing for 6 or 7 pin Small format IC core (less core) also available
Optional Keyways :	**11 Popular competitor keyways available with replacement cylinders**
Finishes :	**US3, US4 , US10B, US26, US32D**
Warranty :	**Limited Lifetime Warranty**

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

KIK Trim Key in Knob Trim



Specifications

ANSI :	**ANSI A156.3, Grade 1**
Construction :	**Steel, Zinc Dichromated Chassis with Secure Thru Bolted design**
Application :	**Standard Duty knob trim option for 1000R & 2000R**
	(Not recommended for SVR devices, Heavy Duty LE trim recommended)
Door Prep :	**Installs in 2 1/8" 161 door prep**
Actuator :	**Cross shaped stainless steel**
Knob :	**2" Wrought Brass Knob - 3" total projection**
Knob Design :	**Ball Knob**
Rose :	**3 3/8" Wrought Brass Roses**
Handing :	**Non-Handed Completely Reversible**
Door Thickness :	**1 3/4"**
Functions :	**Passage, Storeroom & Entry**
Cylinder Options :	**6 Pin Brass, C Kwy, with 2 Keys std.**
Optional Keyways :	**11 Popular competitor keyways available with replacement cylinders**
Finishes :	**US26D**
Warranty :	**Limited Lifetime Warranty**

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

DDS Double Door Strike



DDS x US32D

Specifications

Base Material :	**Stainless Steel**
Dimensions :	**3 1/2" height x 2 1/2" width x 7/16" thick x 3/4" projection (without shims)**
Application :	**Works with 1000 or 2000 series rim exit devices, panic or fire rated Used for pairs of doors that have either a surface vertical rod device or flush bolts securing the inactive leaf**
Handing :	**Non-Handed**
Fasteners :	**Machine, Wood and Self tapping machine screws**
Accessories :	**(2) 1/8" shims required and supplied for use with 1000 series only**
Finishes :	**Plated US3, US4 , US10B, US26 - US32D mill finish**
Warranty :	**Limited Lifetime Warranty**

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

ALK-1000 Exit Alarm Kit

The 1000 Series Exit Alarm Kit is a retrofit kit used to help prevent unauthorized use of an emegency exit door




Specifications

Application :	1000 series rim & surface vertical rod exit devices, panic or fire rated
Operation :	Alarm is armed/disarmed by turning key in the mortise cylinder LED flashes green every 30 seconds to indicate alarm is in armed position Alarm is activated when push bar is depressed
Bypass :	Alarm can be bypassed by trim/key from the outside or by lifting rods manually on SVR device. For a higher level of control niether is recommended
Battery :	9 Volt battery, life approximately 1 year - Low battery alert indicated by red flash & chirp every 5 seconds
Decible Rating :	Approximately 90 decibles at 15 feet
Part Numbers :	ALK-1000 33" for standard length devices & ALK-1000 42" for long devices
Included Parts :	New Slide Cover with LED indicator, Alarm Board, Mounting Plate, Mortise Cylinder, Cylinder Collar, Back Plate, Cylinder Retaining Ring 9 Volt Battery, "Emergency Exit" Sticker for touchpad or door face
Finishes :	US3, US4, US10B, US26, US32D
Cylinders :	1 1/4" Mortise Cylinder with std. cam (included) - 6 Pin Brass, C Kwy, with 2 Keys 1 3/8" Mortise cylinder housing for 6 or 7 pin Small format IC core (less core)
Optional Keyways :	11 Popular competitor keyways available with replacement cylinders
Finishes :	US3, US4 , US10B, US26, US32D
Warranty :	Limited Lifetime Warranty

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

CD-1000 Cylinder Dogging Kit

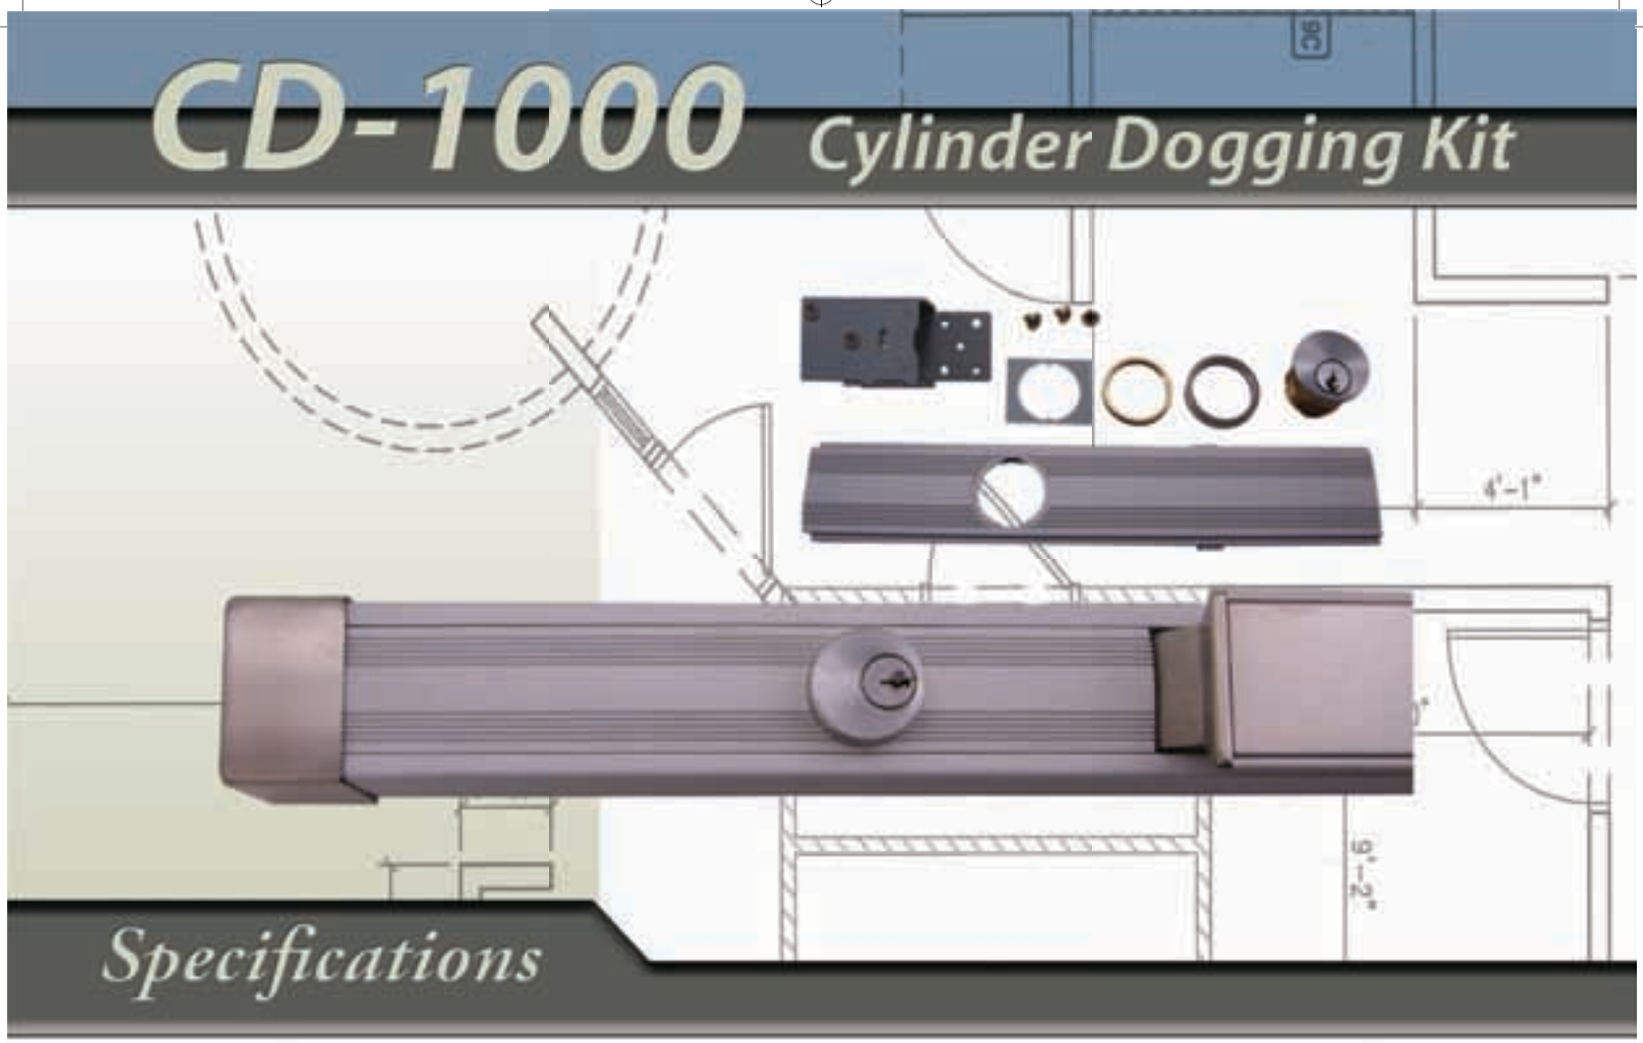

Specifications

Part Numbers :	CD-1000 33" for standard length devices & CD-1000 42" for long devices
Application :	Cylinder Dogging Kits are used to convert 1000 series devices from standard hex key dogging to key controlled dogging thru a mortise cylinder
Operation :	Cylinder dogging allows the push bar to be locked down usng a key so the exit device can operate in push/pull mode to extend the life of the device
Non rated :	For all 1000 series Rim & SVR non fire rated exit devices
Handing :	Non Handed
Included Parts :	New Slide Cover, Cylinder Dogging Assembly, Mortise Cylinder, Cylinder Collar, Back Plate & Cylinder Retaining Ring
Finishes :	US3, US4, US10B, US26, US32D
Cylinders :	1 1/8" Mortise Cylinder with std. cam (included) - 6 Pin Brass, C Kwy, with 2 Keys 1 3/8" Mortise cylinder housing for 6 or 7 pin Small format IC core (less core)
Optional Keyways :	11 Popular competitor keyways available with replacement cylinders
Finishes :	US3, US4 , US10B, US26, US32D
Warranty :	Limited Lifetime Warranty

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

1000 Series Shim Kits



Specifications

Base Material :	Zinc Plated Steel
Dimensions :	1/8" Thick, the kits can be stacked for thicker shimming
Application :	Kits for 1000 series rim or surface vertical rod exit devices, panic or fire rated
	Used for doors with light kits that prevent the device from mounting flush
Handing :	Non-Handed
Included Parts :	Rim kit includes shim for head and end cap.
	SVR kit includes shim for head, end cap, latchches and rod guides
Fasteners :	Extended mounting screws included
Finishes :	Silver zinc plated for US32D and US26,
	Dark Bronze for US10B & Gold for US3 and US4
Warranty :	Limited Lifetime Warranty

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

2000 Series Shim Kits



Specifications

Base Material :	**Zinc Plated Steel**
Dimensions :	**1/8" Thick, the kits can be stacked for thicker shimming**
Application :	**Kits for 2000 series rim or surface vertical rod exit devices, panic or fire rated**
	Used for doors with light kits that prevent the device from mounting flush
Handing :	**Non-Handed**
Included Parts :	**Rim kit includes shim for head and end cap.**
	SVR kit includes shim for head, end cap, latchches and rod guides
Fasteners :	**Extended mounting screws included**
Finishes :	**Silver zinc plated for US32D and AL,**
	Dark Bronze for BZ & Gold for GLD
Warranty :	**Limited Lifetime Warranty**

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net