
TH5 5" Saddle Threshold

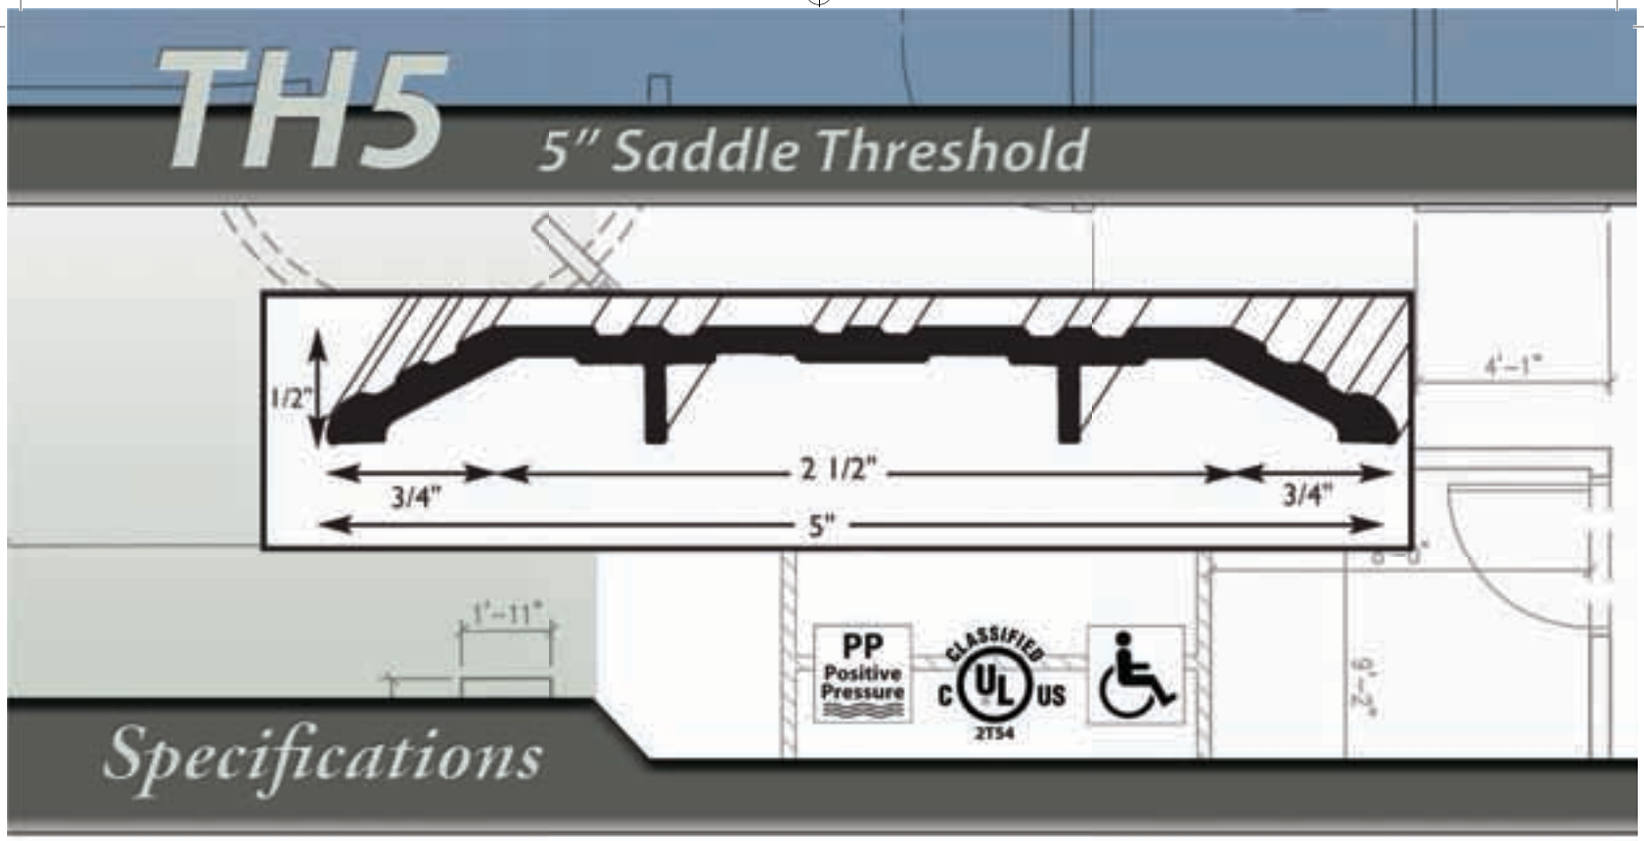


Specifications

Material :	6063-T5 Extruded Aluminum Alloy
UL Ratings :	Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours
UL Positive Pressure :	Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
ADA :	Meets ANSI A117.1 accessibility codes
Width :	5"
Height :	1/2"
Stock Lengths :	Stocked as 36" & 48" (cut 1/2" over) & 72" (cut 1" over)
Non Stock Lengths :	Special order: 32" (cut 1/2" over) Special order: 60" 64", 84" & 96" (cut 1" over)
Stock Finishes :	MF = Mill finish (stock)
Non Stock Finishes :	AA = Clear anodized (special order) GA = Gold anodized (special order) BA = Bright anodized clear (special order) W = White painted (special order) BG = Bright gold anodized (special order) SN = Satin Nickel (special order) BZ = Bronze anodized (special order)
Fasteners :	#10 Phillips wood screws provided
Warranty :	Limited 3 Year

Design Hardware™
211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

TH5P 5″ Panic Threshold

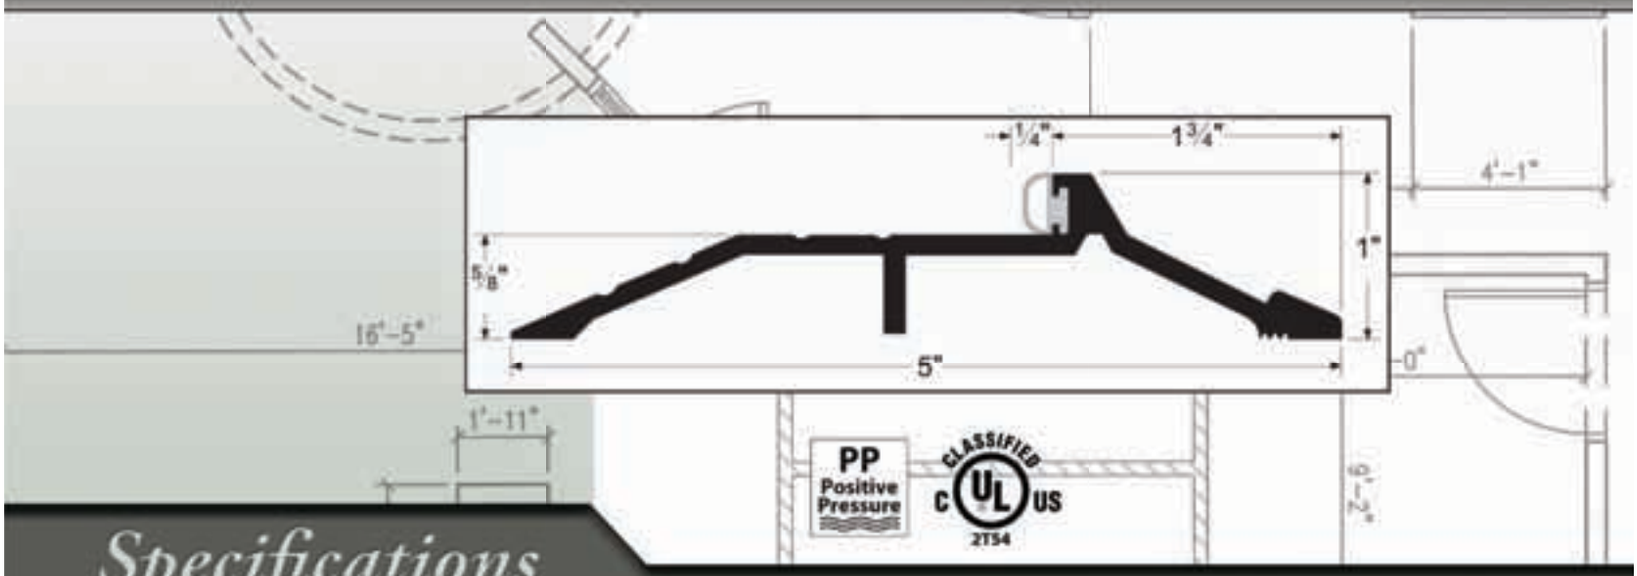


Specifications

Material :	6063-T5 Extruded Aluminum Alloy
UL Ratings :	Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2″ hours
UL Positive Pressure :	Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
Width :	5″
Height :	1″
Stock Lengths :	Stocked as 36″ (cut 1/2″ over) & 72″ (cut 1″ over)
Non Stock Lengths :	Special order: 32″ (cut 1/2″ over) Special order: 48″, 60″ 64″, 84″ & 96″ (cut 1″ over)
Stock Finishes :	MF = Mill finish (stock)
Non Stock Finishes :	AA = Clear anodized (special order) GA = Gold anodized (special order) BA = Bright anodized clear (special order) W = White painted (special order) BG = Bright gold anodized (special order) SN = Satin Nickel (special order) BZ = Bronze anodized (special order)
Fasteners :	#10 Phillips wood screws
Warranty :	Limited 3 Year

Design Hardware™
211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

SW-R Door Sweep - Rubber

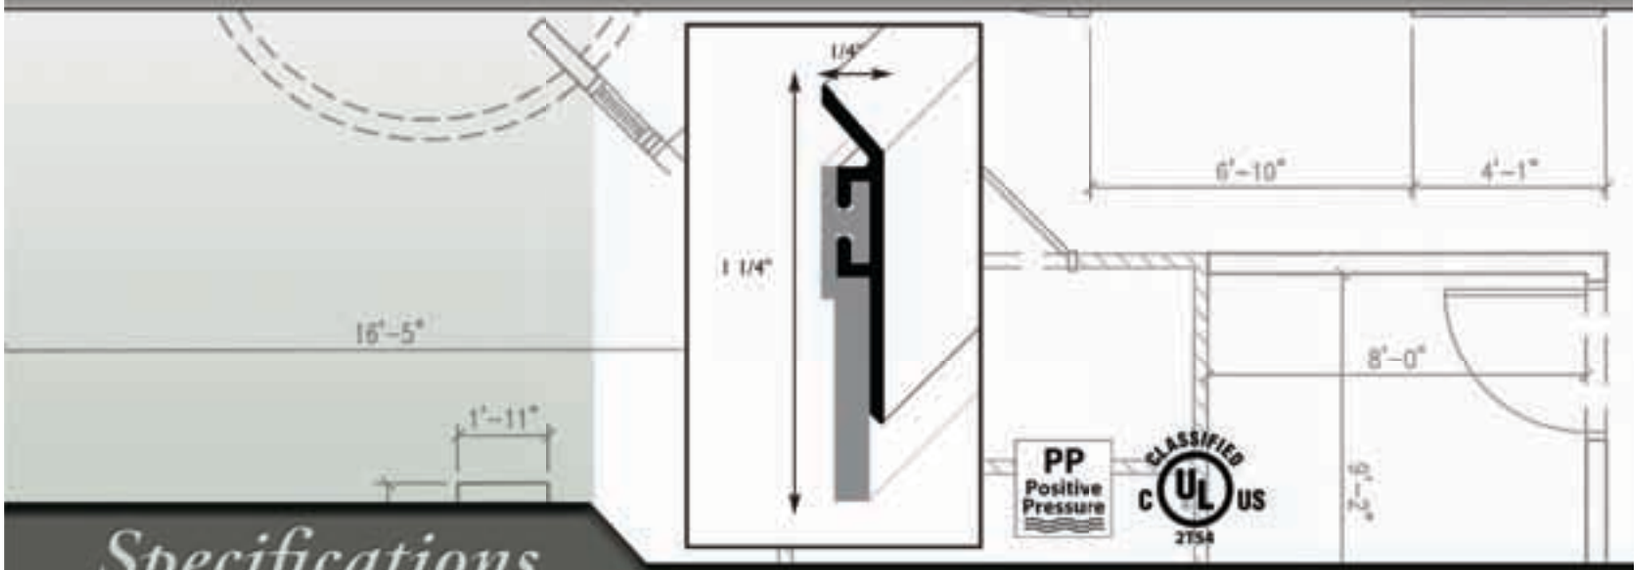


Specifications

Material :	6063-T5 Extruded Aluminum Alloy
Sweep Material :	Heavy Duty Rubber
UL Ratings :	Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours
UL Positive Pressure :	Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476
	Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
Height :	1 1/4"
Thickness :	1/4"
Stock Lengths :	36" (stock)
Non Stock Lengths :	32", 42", 48" (special order)
Stock Finishes :	MF = Mill finish (stock)
Non Stock Finishes :	AA = Clear anodized (special order)
	GA = Gold anodized (special order)
	BA = Bright anodized clear (special order)
	W = White painted (special order)
	BG = Bright gold anodized (special order)
	SN = Satin Nickel (special order)
	BZ = Bronze anodized (special order)
Fasteners :	#6 x 5/8" sheet metal screws provided
Warranty :	Limited 3 Year

Design Hardware™
211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

DC-1

Drip Cap - Overhead Protection

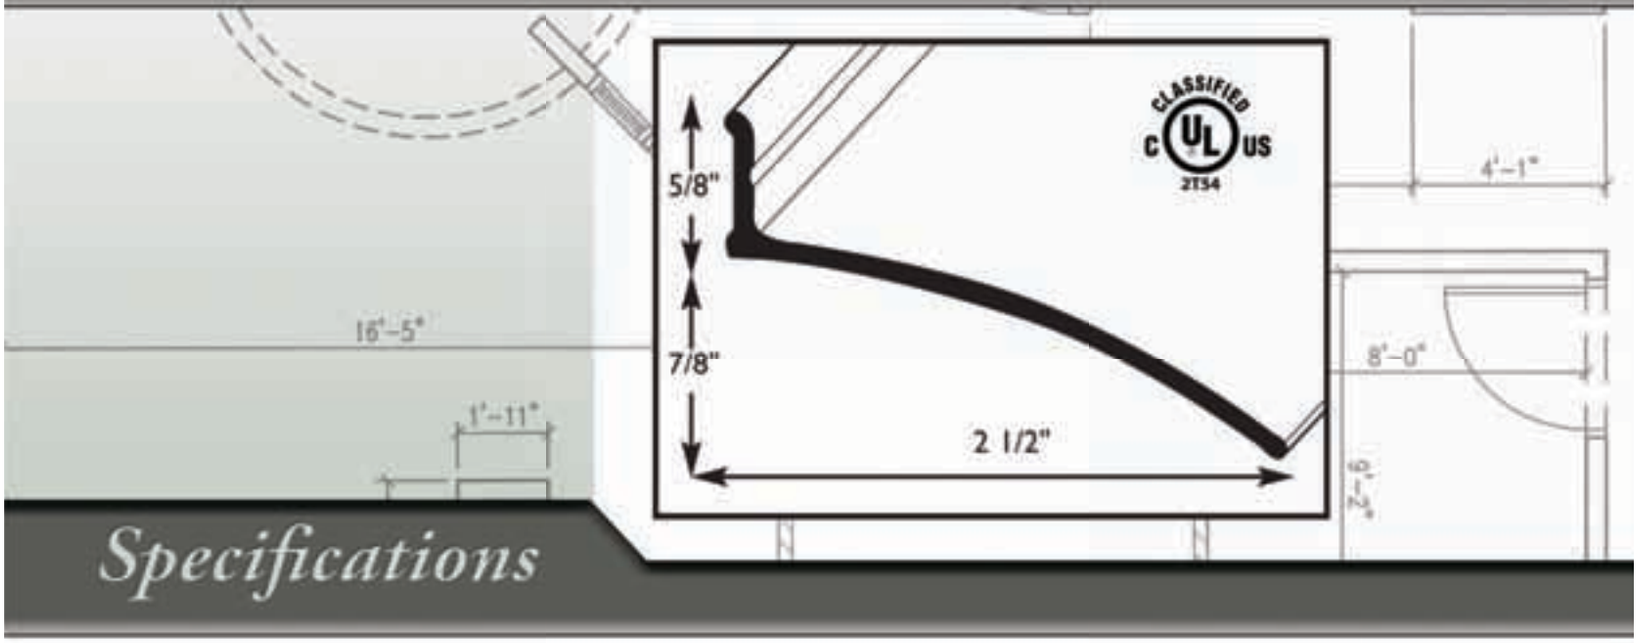


Specifications


Material :	6063-T5 Extruded Aluminum Alloy
UL Ratings :	Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476
Overall Height :	1 1/2"
Mtg. Strip Height :	5/8"
Projection :	2 1/2"
Stock Lengths :	40", 76" (stock)
Non Stock Lengths :	Other lengths available by special order
Stock Finishes :	MF = Mill finish (stock)
Non Stock Finishes :	AA = Clear anodized (special order) GA = Gold anodized (special order) BA = Bright anodized clear (special order) W = White painted (special order) BG = Bright gold anodized (special order) SN = Satin Nickel (special order) BZ = Bronze anodized (special order)
Fasteners :	#6 x 5/8" sheet metal screws provided
Warranty :	Limited 3 Year

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

PS-V Perimeter Seal - Vinyl Bulb

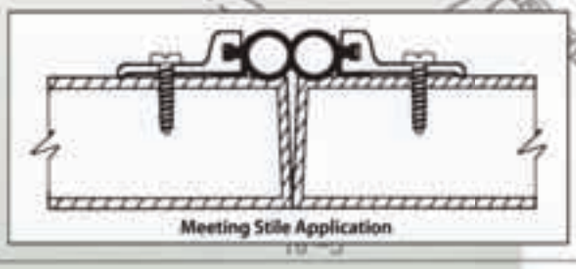

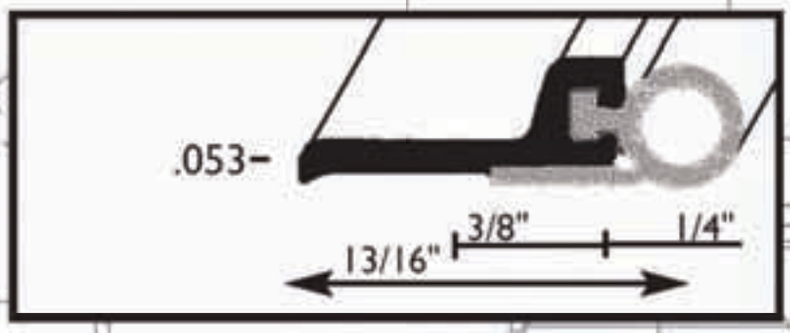

PP Positive Pressure

CLASSIFIED C UL US 2TS4


Specifications

Material :	6063-T5 Extruded Aluminum Alloy
Heavy Duty Vinyl :	Flexible to -35 degrees (ASTM D746), Tear resistant (ASTM-1004) at 50lbs/in Elongation 300% (ASTM D-412), Tensile strength (ASTM D-412) 1800psi
Features :	Flat mount style with 3/8" secondary seal
UL Ratings :	Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours
UL Positive Pressure :	Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
Width :	1 3/16" overall x 1/4" x 1/4" vinyl bulb
Size Options :	(1) 36" piece & (2) 84" pieces for single doors (1) 72" piece & (2) 84 " pieces for pairs of doors Other sizes available by special order
Stock Finishes :	MF = Mill finish (stock)
Non Stock Finishes :	AA = Clear anodized (special order) GA = Gold anodized (special order) BA = Bright anodized clear (special order) W = White painted (special order) BG = Bright gold anodized (special order) SN = Satin Nickel (special order) BZ = Bronze anodized (special order)
Fasteners :	#6 x 5/8" sheet metal screws provided and installed in slotted holes 7"-9" apart and not more than 3" from end
Warranty :	Limited 3 Year

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

SS-S Santoprene Smoke Seal

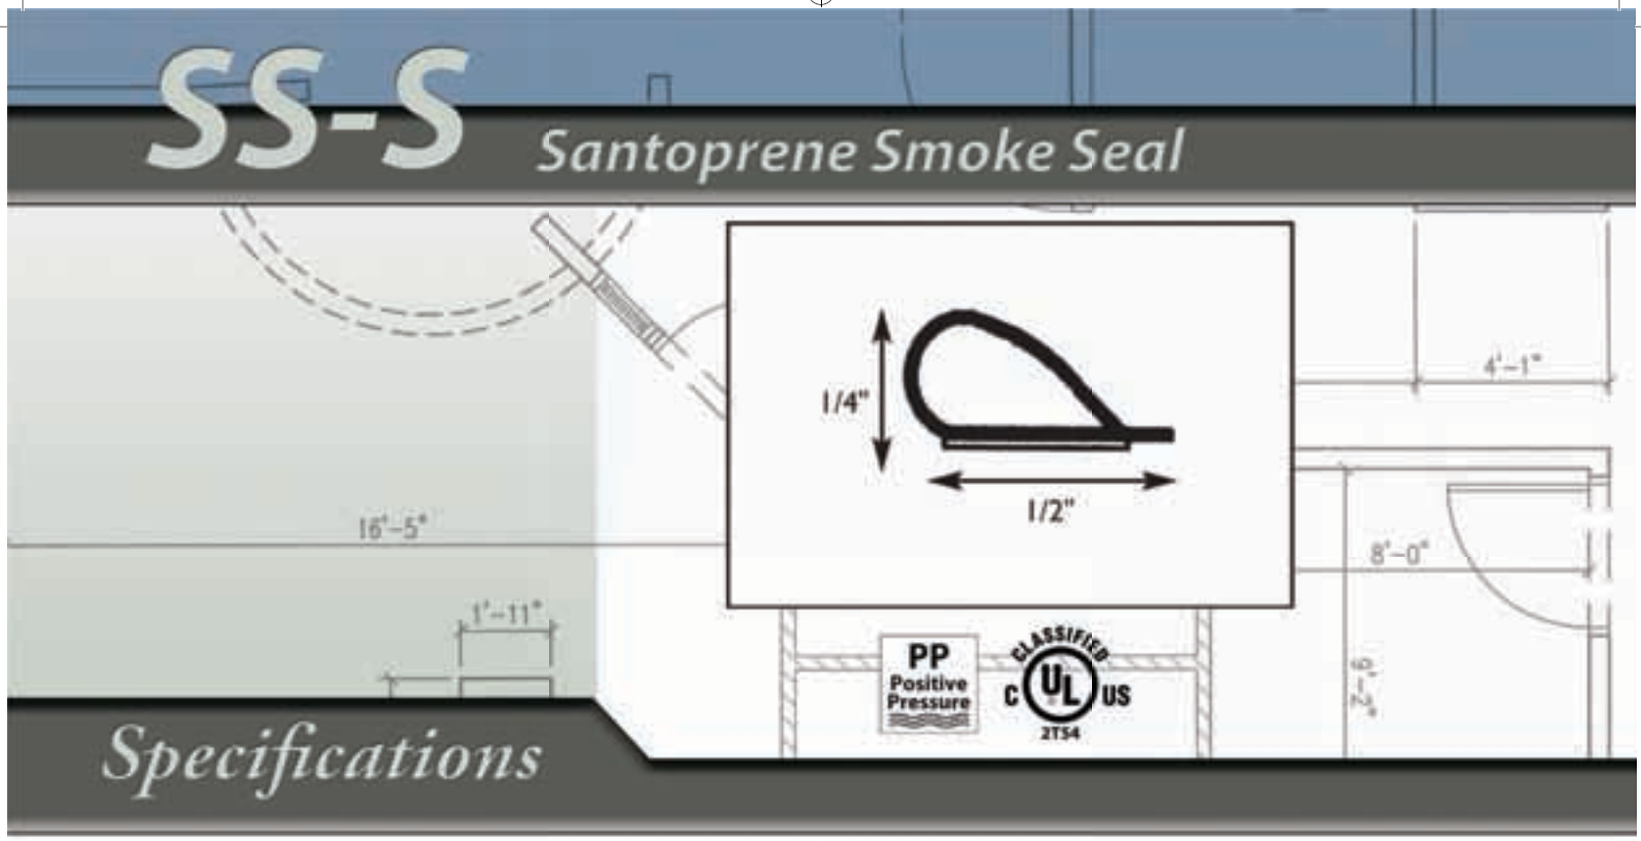


Specifications


Material :	Extruded Thermoplastic Rubber Santoprene #251-80
Features :	Excellent resistance to compression set, ozone, ultraviolet exposure, fungus and mildew. Flame Retardent
UL Ratings :	Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours
UL Positive Pressure :	Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
Width :	1/2"
Height :	1/4"
Stock Lengths :	17' Roll & 21' Roll
Stock Color :	Brown
Non Stock Colors :	Black, White (special order)
Fastening :	Self Adhesive backing installs easily to door frame
Warranty :	Limited 3 Year

Design Hardware™
211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

MA-BR Meeting Astagal - Brush



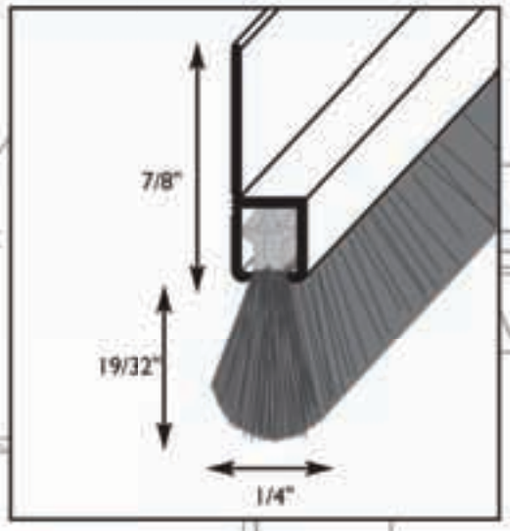



PP Positive Pressure

CLASSIFIED C UL US 2TS4


Specifications

Material :	6063-T5 Extruded Aluminum Alloy
Seal Material :	Heavy Duty Nylon Brush
Applications :	Meeting Stile, Door Sweep, Perimeter Seal
UL Ratings :	Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours
UL Positive Pressure :	Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476
	Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
Overall Height :	1 15/32"
Brush Height :	19/32"
Thickness :	1/4"
Stock Lengths :	84", 96" (stock)
Non Stock Lengths :	32", 36, 42", 48", 60", 72", 96" (special order)
Stock Finishes :	MF = Mill finish (stock)
Non Stock Finishes :	AA = Clear anodized (special order)
	GA = Gold anodized (special order)
	BA = Bright anodized clear (special order)
	W = White painted (special order)
	BG = Bright gold anodized (special order)
	SN = Satin Nickel (special order)
	BZ = Bronze anodized (special order)
Fasteners :	#6 x 5/8" sheet metal screws provided and installed in slotted holes 7"-9" apart and not more than 3" from end
Warranty :	Limited 3 Year

Design Hardware™

211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net

AS-1 Overlapping Meeting Stile Astragal

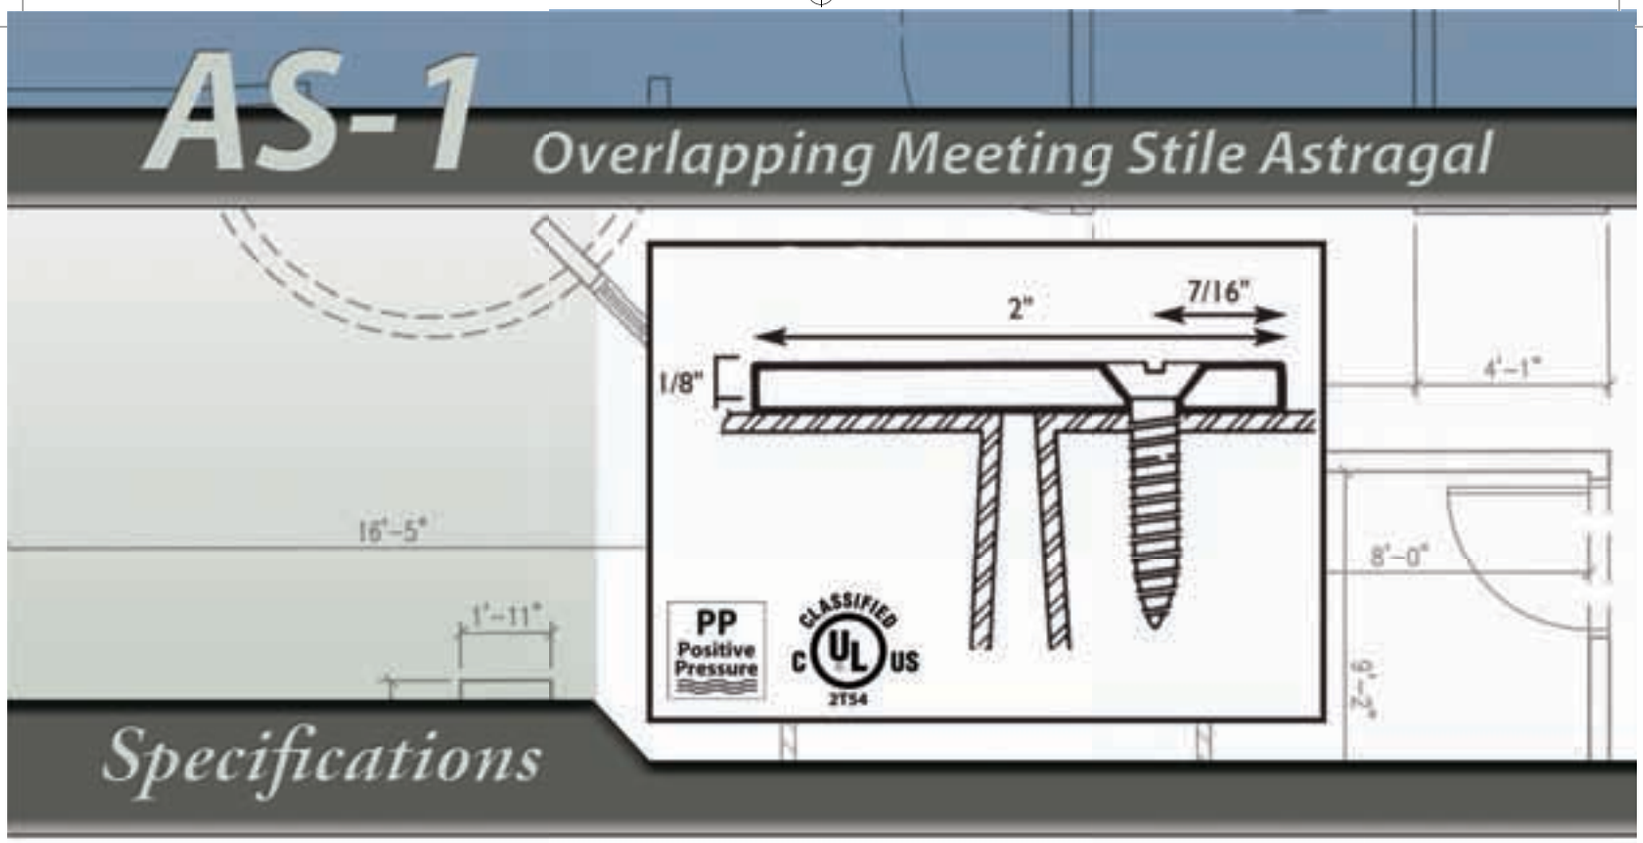

Specifications

Material :	6063-T5 Extruded Aluminum Alloy
Application :	Used at meeting stiles on pairs of doors to help maintain NFPA 80
UL Ratings :	Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours
UL Positive Pressure :	Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
Width :	2"
Thickness :	1/8"
Stock Length :	84" (stock)
Non Stock Lengths :	80", 96", 108", 120" (special order)
Stock Finishes :	AA = Clear Anodized (stock)
Non Stock Finishes :	MF = Mill Finish (special order) GA = Gold anodized (special order) BA = Bright anodized clear (special order) W = White painted (special order) BG = Bright gold anodized (special order) SN = Satin Nickel (special order) BZ = Bronze anodized (special order)
Fasteners :	#10 x 1" sheet metal screws provided
Warranty :	Limited 3 Year

Design Hardware™
211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net