NOSINGS


A heavy duty safety nosing with silicon carbide granules integrally cast into the surface. Designed for new construction of poured concrete, Terrazzo or Steel Pan cement filled stairs. Prevents breaking and chipping of stair edge.

Fasteners: #14 x 1-1/2" flat head zinc plated sheet metal screws with lead anchor

Options: Cast-on anchors available upon request

Notes:
- Furnished with countersunk holes
- Cross hatch surface
- Cut with a reinforced abrasive disk, 1/8" thick, either aluminum oxide or silicon carbide
- Maximum length available is 8', except 6" widths which are 7' maximum
- Available in 3", 4", and 6" widths


640S



Finishes: CAL

Certifications:


641S

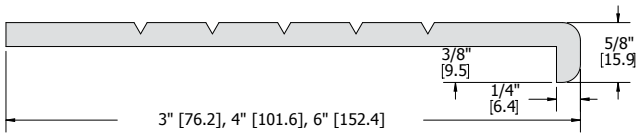

Finishes: CAL

Certifications:

642S

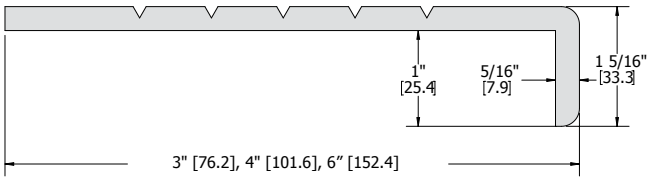

Finishes: CAL

Certifications:

COVER PLATE ASSEMBLY THRESHOLDS

Used with floor closers either center or offset hung, single/double door application


Fasteners: #10 x 1-1/2" flat head sheet metal screws, other screw types and anchors available upon request

Options: Available with Sure Step non-slip abrasive coating

Order: Specify closer manufacturer, offset, closer model number, thickness of door, width of door opening and handing

Notes:
- MIL finish thresholds are supplied with zinc plated screws
- Brass thresholds are supplied with brass screws
- Color anodized thresholds are supplied with screws plated to match

651S

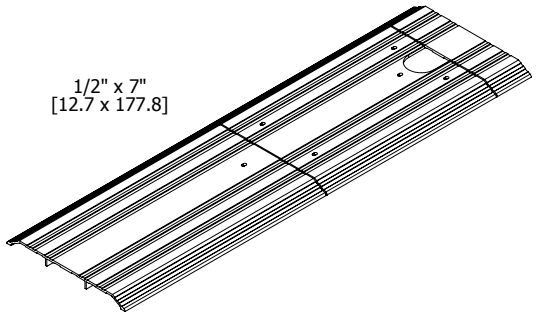


Finishes: MIL, DBA, MIB

Certifications:

Notes:
- Center hung
- Without mitered ends

652S

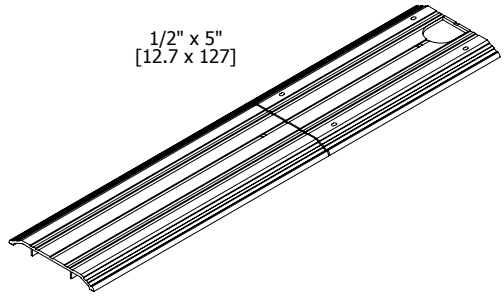

Finishes: MIL, DBA, MIB


Certifications:

Notes:
- Center hung
- Without mitered ends

THRESHOLDS & WEATHERSTRIPPING


COVER PLATE ASSEMBLY THRESHOLDS (CONTINUED)

653S

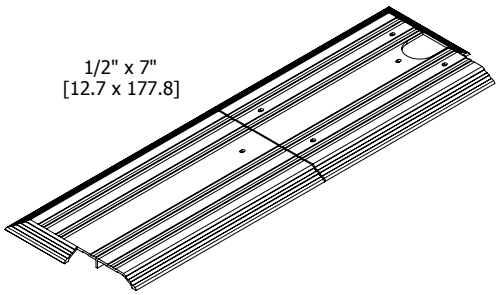


Finishes: MIL, DBA, MIB
Certifications:
Notes:
- Offset hung
- With mitered ends

654S

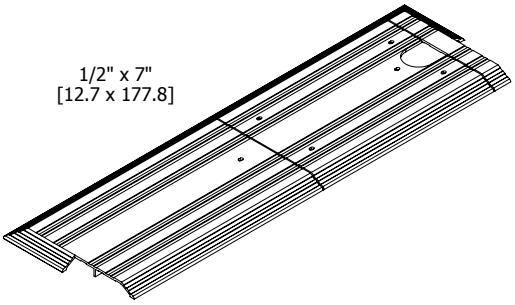

Finishes: MIL, DBA, MIB
Certifications:
Notes:
- Center hung
- With mitered ends

655S

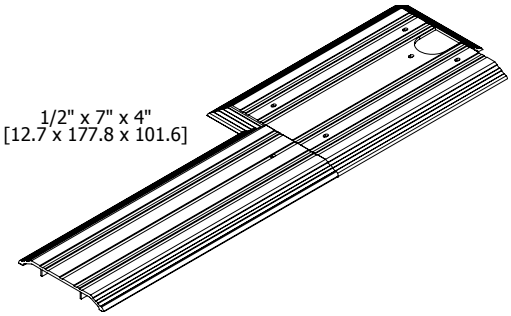

Finishes: MIL, DBA, MIB
Certifications:
Notes:
- Offset hung
- With mitered ends

COVER PLATES

Cover Plates are used primarily to cover expansion joints and for situations requiring extra width or strength. Manufactured from solid cold rolled aluminum for extra durability.


Fasteners: Furnished without holes and fasteners unless specified
Notes:
- Available to 96" in length
- Furnished with both edges beveled

676S



Finishes: MIL
Certifications:

677S




Finishes: MIL
Certifications:

THRESHOLD ANCHORS


Threshold Anchors provide a fully adjustable anchor for concrete installation. Special locking nut assemblies can be positioned to accommodate various mounting hole spacings.

Order: Specify 1/4"-20 mounting holes for any threshold intended for use with the 619S
Fasteners: 1/4"-20 Flat head screws and locking nut assembly per foot of anchor

619S




Finishes: MIL

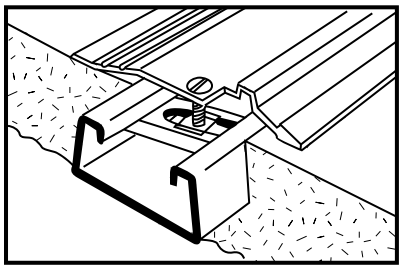

INTERLOCKING/OVERHEAD DRIP GUARDS


Fasteners: #6 x 5/8" pan head sheet metal screws

711S

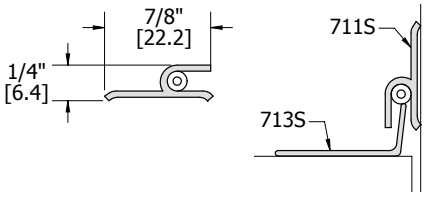


Finishes: MIL, DBA, GLD
Insert: V
Certifications:

713S




Finishes: DBA, GLD, MIB, CLR
Certifications:

715S

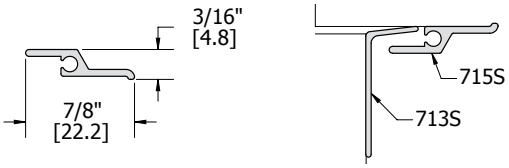


Finishes: DBA, GLD, MIB, CLR
Certifications:

717S

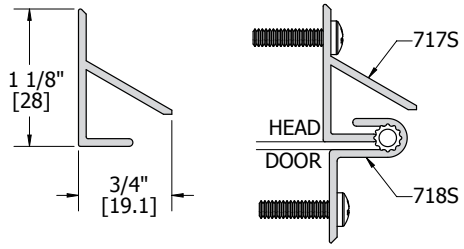


Finishes: MIL, DBA
Certifications:

718S




Finishes: MIL, DBA, GLD
Inserts: V
Certifications:

770S



Finishes: MIL, DBA, GLD
Insert: B, V
Certifications:

810S

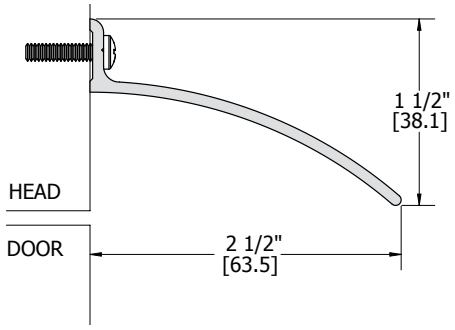


Finishes: MIL, DBA, GLD
Certifications:

THRESHOLDS & WEATHERSTRIPPING

PRESS-ON WEATHERSTRIPPING


Combination Edge-Sealing System with Smoke Control
Field applied edge-sealing system gaskets with integrated smoke fin. Add to the frame of a B, C or 1/3 hour labeled fire door to comply with positive pressure requirements of UBC 7-2 1997 Part I. Also qualifies as smoke control gasketing (UBC 7-2 1997 Part II) necessary to complete installation instructions and validate the "S" label on a smoke control door.

719




Finishes: Charcoal, Brown, Grey, Tan, White
Category: H, G, J
Certifications:
Notes:
- Requires 1/8" clearance
- Not recommended for door frames with 1/2" stop or less
- Recommend 3/16" backset - door side hinge
- Intumescent material
- Will not degrade from carbon dioxide and ozone

720




Finishes: Charcoal, Brown, Grey, Tan, White
Category: H, G, J
Certifications:
Notes:
- Thin design for doors and frames with tight tolerances
- Intumescent material
- Will not degrade from carbon dioxide and ozone

722



Finishes: Charcoal, Brown, Tan, White
Category: H, G, J
Certifications:
Notes:
- Requires 1/8" clearance. Recommend 3/16" backset - door side hinge
- Intumescent material
- Will not degrade from carbon dioxide and ozone


734



Finishes: Charcoal, Brown, Grey, Tan
Category: H, G, J
Certifications:
Notes:
- Intumescent material
- Will not degrade from carbon dioxide and ozone


Edge-Sealing Systems
Field applied edge-sealing system gaskets. Add to the frame of a B, C or 1/3-hour labeled fire doors to comply with the new positive pressure requirements of UBC 7-2 1997 Part I.

724



Finishes: Charcoal, Brown, Grey, Tan, White
Category: G
Certifications:
Notes: Intumescent material
- Will not degrade from carbon dioxide and ozone

729




Finishes: Charcoal, Brown, Grey, Tan, White
Category: G
Certifications:
Notes:
- Intumescent material
- Will not degrade from carbon dioxide and ozone

PRESS-ON WEATHERSTRIPPING (CONTINUED)


Smoke Seal Systems
Add to the frame of a smoke rated opening to comply with the requirements of UBC 7-2 1997 Part II, NFPA 105 and UL1784. The addition of a smoke seal is necessary to complete installation instructions and validate the "S" label of a smoke control door.

721




Finishes: Charcoal, Brown, Grey, Tan, White
Category: H, J
Certifications:
Notes: Thermoplastic Elastomer (TPE) material

726




Finishes: Charcoal, Brown, White
Category: H, J
Certifications:
Notes: Silicone material

736



Finishes: Charcoal, White
Category: H, J
Certifications:
Notes: Silicone material


737



Finishes: Charcoal, White
Category: H, J
Certifications:
Notes: Silicone material


Draft Control Gaskets

725




Finishes: Charcoal
Category: J
Certifications:
Notes: Sponge neoprene material

727



Finishes: Charcoal
Category: J
Certifications:
Notes: Thermoplastic Elastomer (TPE) material

728



Finishes: Charcoal, White
Category: J
Certifications:
Notes: Thermoplastic Elastomer (TPE) material

THRESHOLDS & WEATHERSTRIPPING


DOOR BOTTOMS

Provides a seal against weather. For best results, use in conjunction with a threshold.

Fasteners: #6 x 5/8" Pan head sheet metal screws


Notes:
- Lengths up to 48" are supplied 1/2" over their stated size to allow for fitting
- Lengths over 48" are supplied 1" over size
- "Cut to exact length" may be specified
- Constructed of strong extruded 6063-T5 aluminum

751S

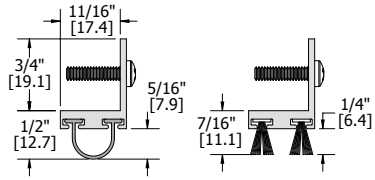


Finishes: MIL, DBA, GLD
Inserts: V, N, S, W
Category: H, J
Certifications:

772S

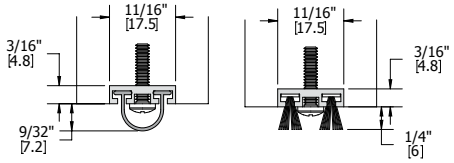


Finishes: MIL, DBA, GLD
Inserts: V, N, S, W
Category: H, J
Certifications:

774S




Finishes: MIL, DBA
Inserts: V, N
Category: H, J
Certifications:

775S




Finishes: MIL, DBA
Inserts: V
Category: H, J
Certifications:

776S




Finishes: CLR, DBA, GLD
Inserts: N
Category: H, J
Certifications:

777S



Finishes: MIL, DBA, GLD
Inserts: V, N
Category: H, J
Certifications:


778S



Finishes: MIL, DBA, GLD
Inserts: V, N
Category: H, J
Certifications:


DOOR BOTTOMS (CONTINUED)

779S




Finishes: MIL, DBA, GLD
Inserts: V, N
Category: H, J
Certifications:

780S




Finishes: MIL, DBA, GLD
Inserts: V, N
Category: H, J
Certifications:

781S




Finishes: MIL, DBA, GLD
Inserts: V, N
Category: H, J
Certifications:

782S

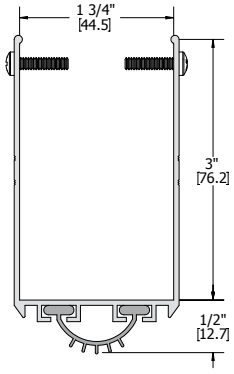


Finishes: MIL, DBA, GLD
Inserts: V, N
Category: H, J
Certifications:

783S




Finishes: MIL, DBA, GLD
Inserts: V
Category: J
Certifications:

787S



Finishes: MIL
Inserts: N
Category: H, J
Certifications:

789S



Finishes: MIL, DBA, GLD
Inserts: W
Category: H, J
Certifications:


AUTOMATIC DOOR BOTTOMS

Provides an outstanding seal against drafts, light, smoke and sound. For best results, use in conjunction with a threshold. When door fully closes, the gasket extends downward to provide a seal. Gasket retracts when door is opened.

Fasteners:
- #8 x 1-1/4" pan head sheet metal screws furnished with surface mount types
- #6 x 5/8" Pan head sheet metal screws furnished with mortise types and surface mount types

Notes:
- Furnished exact length as stated. May be trimmed for fitting (2" maximum).
- Furnished with end cover and strike plates.

730S




Finishes: MIL
Inserts: N, S
Category: H, J
Certifications:

THRESHOLDS & WEATHERSTRIPPING


AUTOMATIC DOOR BOTTOMS (CONTINUED)

740S



Finishes: DBA, GLD, CLR
Inserts: N, S
Category: H, J
Certifications:


742S



Finishes: MIL
Inserts: N, V
Category: J
Certifications:


Notes: For use on hollow metal door

743S



Finishes: MIL
Inserts: N
Category: H, J
Certifications:

747S




Finishes: CLR, DBA, GLD
Inserts: N
Category: H, J
Certifications:

DOOR BOTTOM SWEEPS


Typically door bottom sweeps are used on the exterior of an outswing door
Fasteners: #6 x 5/8" pan head sheet metal screws furnished with mortise types
Notes:
- MIL finish weatherstripping is supplied with zinc plated screws
- Brass weatherstripping is supplied with brass screws
- Color anodized weatherstripping is supplied with screws plated to match
- Stainless steel weatherstripping is supplied with stainless steel screws

750S




Finishes: DBA, GLD, MIB, CLR, US32D
Inserts: N, S
Category: H, J
Certifications:

752S



Finishes: MIL, DBA, GLD
Inserts: V
Category: H, J
Certifications:


753S



Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:


DOOR BOTTOMS SWEEPS (CONTINUED)

754S




Finishes: DBA, GLD, CLR
Inserts: N
Category: H, J
Certifications:

756S




Finishes: MIL, DBA, GLD
Inserts: V
Category: H, J
Certifications:

759S




Finishes: MIL, DBA, GLD
Inserts: V
Category: H, J
Certifications:

770S




Finishes: MIL, DBA, GLD
Inserts: B, V, or without insert
Category: H, J (with insert only)
Certifications:

801S




Finishes: MIL, DBA, GLD
Inserts: B
Category: H, J
Certifications:

802S




Finishes: MIL, DBA, GLD
Inserts: B
Category: H, J
Certifications:

806S



Finishes: MIL, DBA, GLD
Inserts: B
Category: H, J
Certifications:

872S



Finishes: DBA, GLD, MIB*, CLR, US32D*
Inserts: N
Category: H, J
Certifications:

*US32D and MIB will be supplied with grey Neoprene as opposed to the standard black


THRESHOLDS & WEATHERSTRIPPING

JAMB WEATHERSTRIPPING

Fasteners: #6 x 5/8" Pan head sheet metal screws


Notes:
- MIL finish weatherstripping is supplied with zinc plated screws
- Brass weatherstripping is supplied with brass screws
- Color anodized weatherstripping is supplied with screws plated to match
- Stainless steel weatherstripping is supplied with stainless steel screws

785S




Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:

800S




Finishes: MIL, DBA, GLD
Inserts: B
Category: H, J
Certifications:

802S




Finishes: MIL, DBA, GLD
Inserts: B
Category: H, J
Certifications:

803S



Finishes: MIL, DBA, GLD
Inserts: B
Category: H, J
Certifications:


808S



Finishes: MIL, DBA, GLD
Inserts: B
Category: H, J
Certifications:


JAMB WEATHERSTRIPPING (CONTINUED)

858S

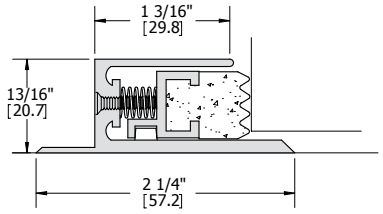


Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:
Notes:
- Use with stopless frames only
- Spring adjustable

859S




Finishes: MIL, DBA, GLD
Category: H, J
Certifications:
Notes: Magnetic

860S

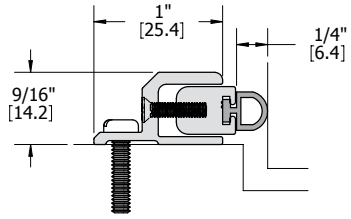


Finishes: MIL, DBA, GLD
Inserts: V, N, S, W
Category: H, J
Certifications:
Notes: Adjustable

861S




Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:

862S



Finishes: DBA, GLD, CLR
Inserts: N
Category: H, J
Certifications:

863S




Finishes: DBA, GLD, CLR
Inserts: N
Category: H, J
Certifications:

THRESHOLDS & WEATHERSTRIPPING


JAMB WEATHERSTRIPPING (CONTINUED)

864S

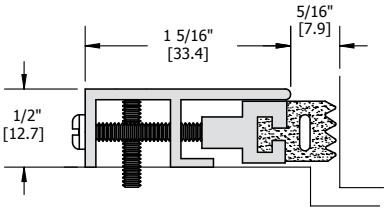


Finishes: DBA, GLD, CLR
Inserts: N
Category: H, J
Certifications:
Notes: Adjustable

870S

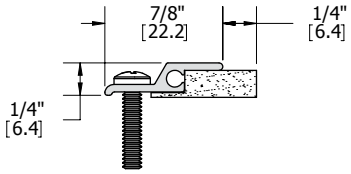


Finishes: DBA, GLD, MIB, CLR, US32D
Inserts: N
Category: H, J
Certifications:
Notes: Adjustable

865S

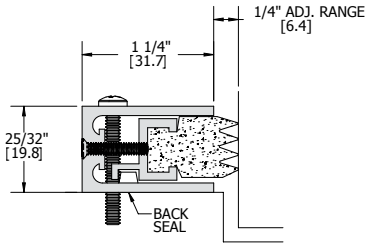


Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:
Notes: Adjustable

871S




Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:

866S

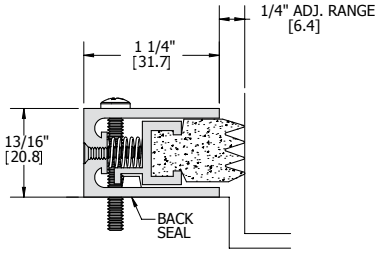

Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:
Notes: Spring adjustable


873S

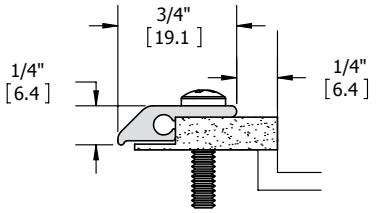

Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:


JAMB WEATHERSTRIPPING (CONTINUED)

874S

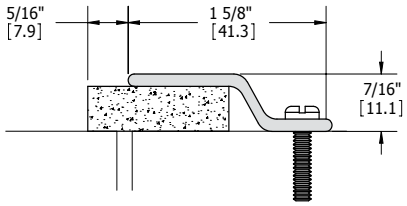


Finishes: MIL, DBA, GLD, US32D
Inserts: N
Category: H, J
Certifications:

875S




Finishes: DBA, GLD, MIB, CLR
Inserts: N, S
Category: H, J
Certifications:

877S




Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:

878S




Finishes: DBA, GLD, CLR
Inserts: N
Category: H, J
Certifications:

880S



Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:

881S

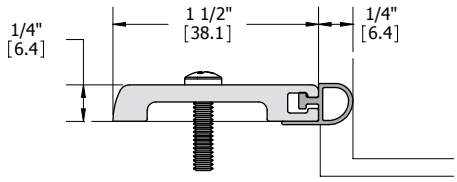


Finishes: MIL, DBA, GLD
Inserts: V, N, S, W
Category: H, J
Certifications:

Notes: Hardware compatible. Testing showed product to withstand 600 lbs per square inch of force

THRESHOLDS & WEATHERSTRIPPING


JAMB WEATHERSTRIPPING (CONTINUED)

882S




Finishes: DBA, GLD, CLR
Inserts: B
Category: H, J
Certifications:

883S




Finishes: DBA, GLD, CLR
Inserts: B
Category: H, J
Certifications:

884S

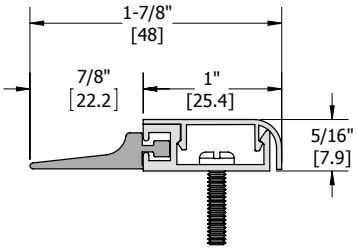


Finishes: DBA, GLD, CLR
Inserts: V
Category: H, J
Certifications:

885S




Finishes: DBA, GLD, CLR
Inserts: V, N, S, W, F
Category: H, J
Certifications:

887S

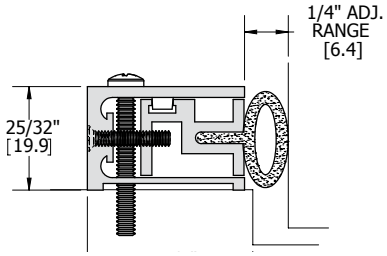

Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:
Notes: Adjustable


890S

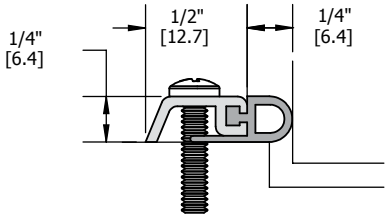

Finishes: MIL, DBA, GLD
Inserts: V, N, S
Category: H, J
Certifications:


JAMB WEATHERSTRIPPING (CONTINUED)

891S

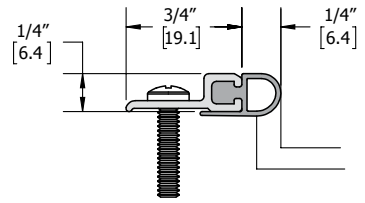


Finishes: MIL, DBA, GLD
Inserts: V, N, S, F
Category: H, J
Certifications:

896S

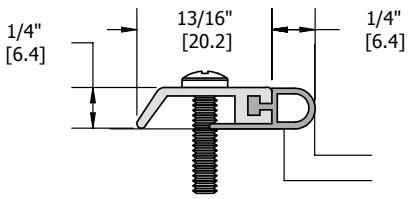


Finishes: MIL, DBA, GLD
Inserts: V, N, S
Category: H, J
Certifications:

892S



Finishes: MIL, DBA, GLD
Inserts: N
Category: H, J
Certifications:

893S

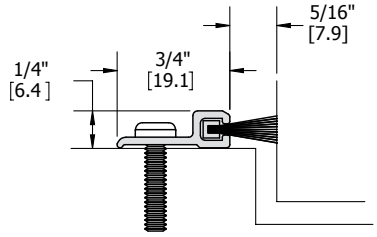

Finishes: MIL, DBA, GLD
Inserts: W
Category: J
Certifications:

THRESHOLDS & WEATHERSTRIPPING


ASTRAGALS/MEETING STILES

Fire labeled Astragals & Meeting Stiles should only be mounted on pairs of doors with a gap that meets NFPA 80 2-3.1.7 (1/8" +- 1/16" for steel doors and not exceeding 1/8" for wood doors)

Fasteners: #6 x 5/8" Pan head sheet metal screws


Notes:
- MIL finish weatherstripping is supplied with zinc plated screws
- Brass weatherstripping is supplied with brass screws
- Color anodized weatherstripping is supplied with screws plated to match
- Stainless steel weatherstripping is supplied with stainless steel screws

756S

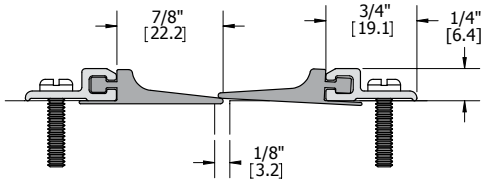


Finishes: MIL, DBA, GLD
Inserts: V
Category: H, J
Certifications:
Notes: Order two (2) for a set

771S

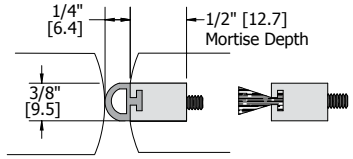


Finishes: MIL, DBA
Inserts: V, W, N, S
Category: J
Certifications:
Notes: Order two (2) for a set

772S

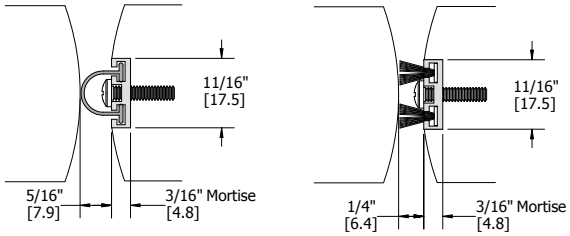


Finishes: MIL, DBA, GLD
Inserts: V, W, N, S
Category: J
Certifications:

774S



Finishes: MIL, DBA
Inserts: V, N
Category: H, J
Certifications:


775S

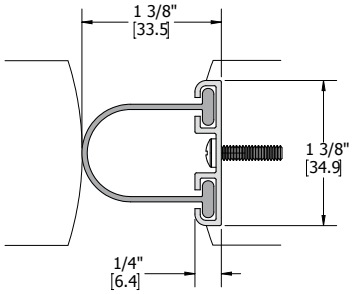

Finishes: MIL, DBA
Inserts: V
Category: H, J
Certifications:


ASTRAGALS/MEETING STILES (CONTINUED)

776S

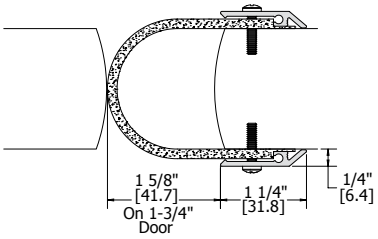


Finishes: DBA, GLD, CLR
Inserts: N
Category: H, J
Certifications:

802S

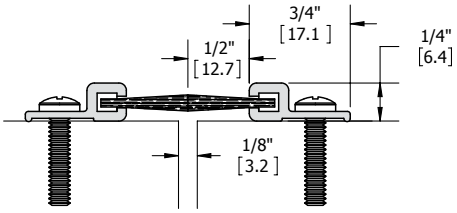


Finishes: MIL, DBA, GLD
Inserts: B
Category: H, J
Certifications:
Notes: Order two (2) for a set

835S

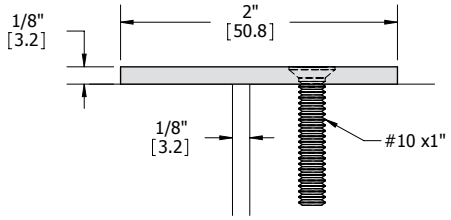


Finishes: MIL, DBA, GLD, US32D, USP
Category: J
Certifications:
Notes:
- Maximum length = 10 feet
- Available with thrubolts

836S




Finishes: MIL, DBA, GLD
Category: H, J
Certifications:

837S



Finishes: MIL, DBA, GLD
Inserts: W, V, N, S
Category: H, J
Certifications:

838S




Finishes: MIL
Inserts: B
Category: J
Certifications:

THRESHOLDS & WEATHERSTRIPPING


ASTRAGALS/MEETING STILES (CONTINUED)

839S




Finishes: MIL
Inserts: B
Category: J
Certifications:

840S

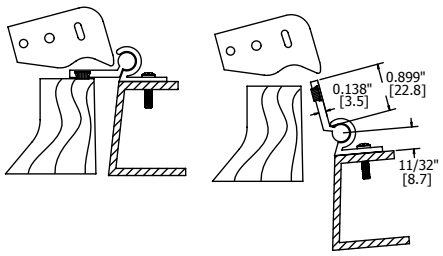


Finishes: MIL, DBA, GLD
Inserts: W
Notes: 96” maximum door height

844S




Finishes: MIL, DBA
Inserts: N
Category: H, J
Certifications:

845S | 846S

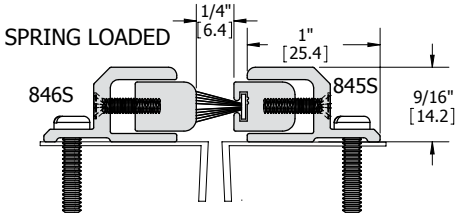


Finishes: MIL, DBA, GLD
Inserts: W
Category: J
Certifications:
Notes:
- Adjustable
- Order two (2) for a set

847S | 848S

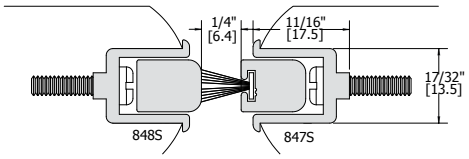

Finishes: MIL, DBA, GLD
Inserts: W
Category: J
Certifications:
Notes:
- Adjustable
- Spring loaded
- Mortise depth = 21/32”


849S

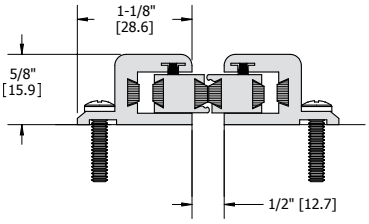

Finishes: MIL, DBA, GLD
Notes:
- Magnetic
- 96” maximum door height
- Designed for use on 80” to 96” doors only
- Sets shorter than 80” may not work properly


ASTRAGALS/MEETING STILES (CONTINUED)

872S

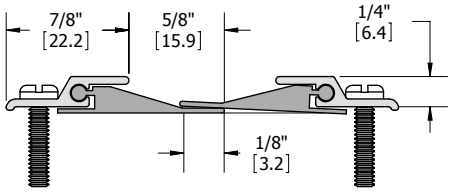

Finishes: DBA, GLD, MIB, CLR, US32D
Inserts: N
Category: H, J
Certifications:
Notes: • Order two (2) for a set

874S

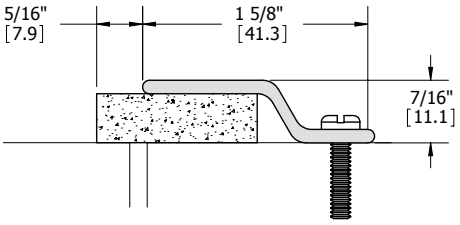


Finishes: MIL, DBA, GLD, US32D
Inserts: N
Category: H, J
Certifications:

SPRING BRONZE

Constructed of high tempered 0.009" gauge bronze to provide a permanent spring. Hemmed edges.
Fasteners: #6 x 7/8" Nail, #4 wafer head drive nails available for metal door frames

820S

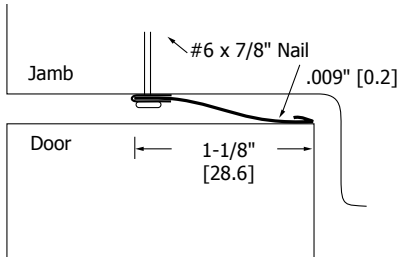


Finishes: MIB
Notes:
- Spring bronze weatherstrip, for wood and wood casement windows
- Supplied with nails; nails should be 1-1/2" on center

THRESHOLDS & WEATHERSTRIPPING

SPRING BRONZE (CONTINUED)


822S

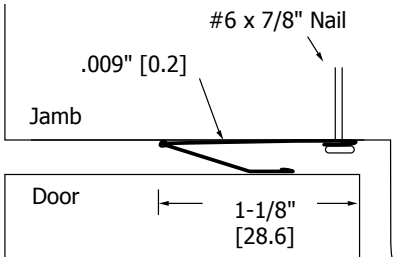

Finishes: MIB


Notes:
- "V" or cushion bronze weatherstrip, for wood or metal doors
- Supplied with fasteners, specify wood or metal application
- Fasteners should be 3" on center

823S

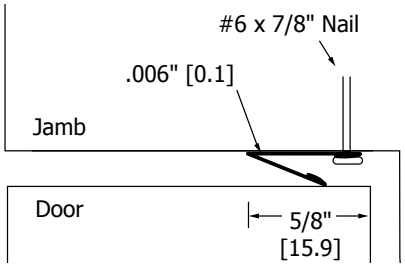

Finishes: MIB

824S

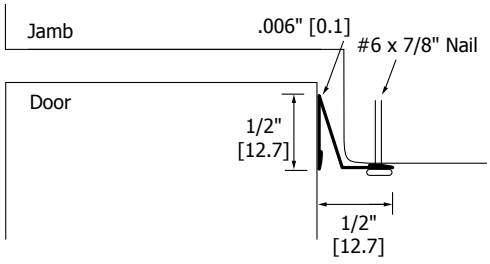

Finishes: MIB