


Ideal for ANSI 2¾" cut-outs

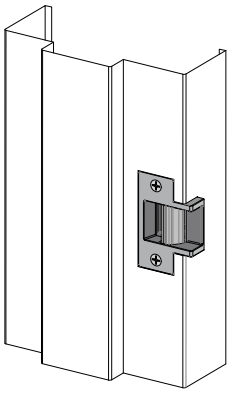

Real **value** and **versatility** from the market leader

Specifications

- ANSI/BHMA A156.31, Grade 2
- Patent pending


Frame Application

- Metal
- Wood

Electrical

- .20 Amps @ 12VDC/VAC
- .10 Amps @ 24VDC/VAC
- DC continuous duty/AC intermittent duty only

The V3 series offers real value, innovation, and flexibility in one compact product. With 9 different faceplate options, the V3 is a drop-in replacement for other manufacturers' electric strikes. Offering up to 1/4" of horizontal adjustability, the V3 is ideal for cylindrical locksets with 1/2" to 5/8" latchbolts, in medium duty applications.

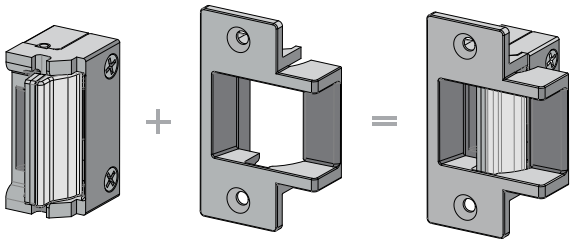

Standard Features

- Small strike body fits in many competitive cut-outs, with no modification to the frame
- 9 flexible faceplate options, from 2-3/4"- 9" long
- Modular components allow you to adjust depth as needed
- Accommodates 1/2" - 5/8" cylindrical latchbolt (5/8" with 1/8" door gap)
- Keeper shims for horizontal adjustment
- Static strength 1000 lbs.
- Dynamic strength 50 ft-lbs.
- Endurance 500,000 cycles
- Available in fail secure
- Non-handed
- One-year limited warranty

Finishes

630 - Satin stainless steel

605 - Bright brass

606 - Satin brass

612 - Satin bronze

613 - Bronze toned

629 - Bright stainless steel

BLK - Black



BHMA ANSI GRADE 2

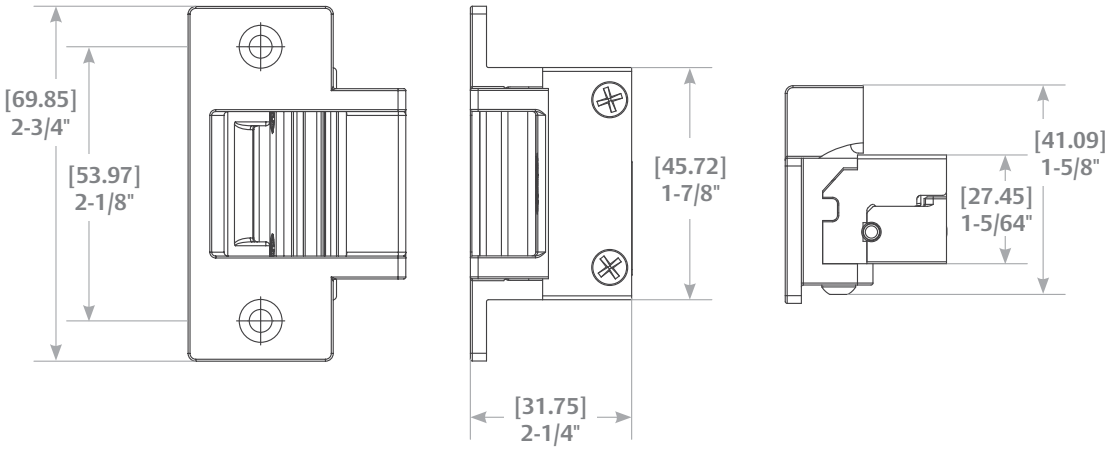


diagram shown with option 7

hes ASSA ABLOY

V3 Faceplate Option Kits

Operation: After release, the keeper returns to the locked position.

type of lock released



4⅞" x 1¼"

Option 1

For use with: Cylindrical locksets. ANSI metal jamb installations. Retrofits: RCI (4114, 7114), ROFU (1702, 1802) and TRINE (012, 2007, 2012).

» *ANSI/BHMA Numbers: #E05031, #E09321, #E09322, #E09323*



4⅞" x 1¼"

Option 1A

For use with: Cylindrical locksets. Metal frame installations with mounting tabs. Retrofits: RCI (4104, 7104).

» *ANSI/BHMA Numbers: #E05031, #E09321, #E09322, #E09323*



7 15/16 x 1 7/16"

Option 2

For use with: Cylindrical locksets. Metal frame installations with mounting tabs. Retrofits: RCI(4108, 7108), ROFU (1704, 1804) and TRINE (2002WR).

» *ANSI/BHMA Numbers: #E05031, #E09321, #E09322, #E09323*



6⅞" x 1¼"

Option 3

For use with: Cylindrical locksets. Metal frame installations with mounting tabs. Retrofits: RCI (4107, 7107), ROFU (1703, 1803) and TRINE (2678).

» *ANSI/BHMA Numbers: #E05031, #E09321, #E09322, #E09323*

Operation: After release, the keeper returns to the locked position.

type of lock released



9" x 1⅜"

Option 4

For use with: Cylindrical locksets. Wood frame applications. Retrofits: ANSI 9" x 1-3/8" cutouts.

» *ANSI/BHMA Numbers: #E05031, #E09321, #E09322, #E09323*




3½" x 1⅜"

Option 5

For use with: Cylindrical locksets. Wood frame installations. Retrofits: TRINE 005.

» *ANSI/BHMA Numbers: #E05031, #E09321, #E09322, #E09323*




7 15/16 x 1 7/16"

Option 6

For use with: Cylindrical locksets. Metal frame or wood installations with mounting tabs. Retrofits: ROFU 1509.

» *ANSI/BHMA Numbers: #E05031, #E09321, #E09322, #E09323*




2¾" x 1⅛"

Option 7

For use with: Cylindrical locksets. Metal jamb installations. Retrofits: ANSI/BHMA A156.115 2-3/4" cutouts.

» *ANSI/BHMA Numbers: #E05031, #E09321, #E09322, #E09323*



2¾" x 1⅛"

Option 7E

For use with: Cylindrical locksets. Extended lip for 'knock-down' style frame installations. Retrofits: ANSI/BHMA A156.115 2-3/4" cutouts.

» *ANSI/BHMA Numbers: #E09391, #E09392, #E09393, #E09331, #E09332, #E09333*