Hercular® Deadbolt



Double cylinder



Single cylinder with thumbturn

Application
High Security deadbolt system for commercial and residential doors.

Operation
90˚ key rotation throws the bolt 1” toward the frame, interlocking two hardened ball bearings with the strike to increase jimmying resistance.


Materials
Ring and cylinder: solid brass
Bolt anti drilling ring: hardened steel
Strike: steel
Pins: nickel silver and stainless steel

Standard finish
Nickel chrome matt, nickel chrome, PVD

Special finish
Antique brass, 10B


Lifetime finishes
US3, US26, US26D, US5A, US10B6

Additional features
- Suitable for two backsets, no need for different parts.
- Easy and friendly to install.
- Easy conversion between standards and drive-in.
- The changeable faceplate has an expanded angle for installation on bevelled doors.
- Supplied as standard with 1” (25 mm) throw.
- Optional as double or single cylinder.
- Thumbturn tail self-adjustable to door thickness.
- Option for captive key deadbolt
- Thumbturn can be set horizontally or vertically in locked position.

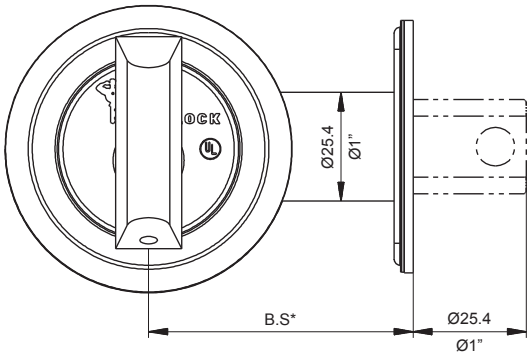

	B.S*
Inch	2⅜
mm	60
Inch	2¾
mm	70

*Adjustable backset

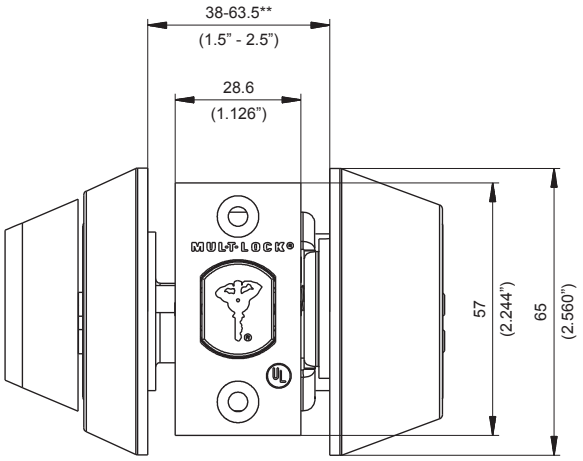

**Door thickness (spacers required for doors less than 38 mm thick)

MUL-T-LOCK®

www.mul-t-lock.com

©2012 Mul-T-Lock Technologies Ltd. The Mul-T-Lock name and the muscleman logo, and any other name, mark or logo used by Mul-T-Lock and marked by ® or ™ sign, are registered/pending trademarks of Mul-T-Lock Ltd. in various countries. Mul-T-Lock reserves the right to make any product improvements or modifications without prior notice.

Hercular® Deadbolt


Cylinder mechanism
Mul-T-Lock's unique, high precision pin tumbler system.

Keys
Reversible nickel silver key with plastic key head and colored insert for identification. Also available in all nickel silver.

Cylinder options
- Classic, Interactive®, MT5® platforms
- Keyed different, keyed alike
- Master keyed
- '3 IN 1' (changeable combination)


Standards
- UL437 - pick and drill resistance
- UL - fire rated bolt
- Conforms to ANSI GRADE 1

Hercular thumbturn tails

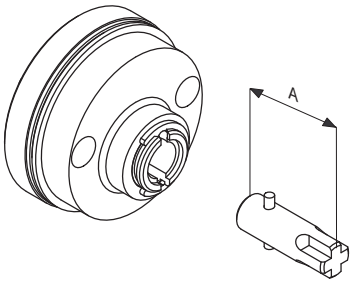

Door thickness		A		Tail P/N
Inch	mm	Inch	mm	
Up to 2	Up to 50.8	0.92	23.5	22900271
2 - 2.5	50.8-63.5	1.22	31	22900275
2.5 - 3	63.5-76.2	1.5	38.5	22900276

Captive deadbolt

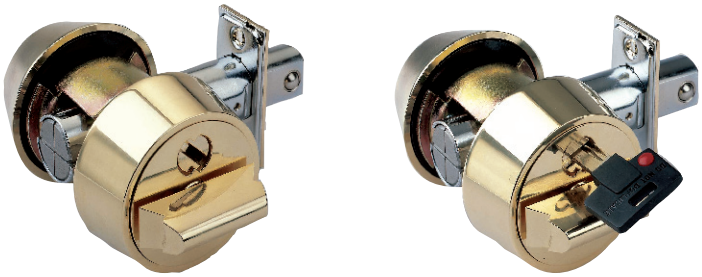

Can be altered by the user to function as a double or single cylinder deadbolt.

©2012 Mul-T-Lock Technologies Ltd. The Mul-T-Lock name and the muscleman logo, and any other name, mark or logo used by Mul-T-Lock and marked by ® or ™ sign, are registered/pending trademarks of Mul-T-Lock Ltd. in various countries. Mul-T-Lock reserves the right to make any product improvements or modifications without prior notice.